



BUILT FOR **TRAVEL**

UCA & LONG TRAVEL SUSPENSION SALES GUIDE



STOCK LENGTH UPPER CONTROL ARMS 2003 - 2009 4RUNNER

PART # 96504



	Travel	Lift	Track Increase
1″	additional	2-3″	0″
×	INSTALLATIO		<u>NS</u>
ADDITIONAL PRODUCT INFO & IMAGES			
Bolt On			

Optional Heim Pivot Upgrade

- Designed for use on 6" or higher drop bracket lift kits.
- TC includes 3/4" chromoly heim joints for the pivots.
- Heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.

Kit Includes

UPPER A-ARMS W/ BUSHINGS
PLATED END WASHERS
1" UNIBALLS W/ RETAINING CLIPS
GRADE 8 HARDWARE
GREASE FITTINGS
TAPERED SPINDLE ADAPTERS

Features and Benefits

- UCA's are designed with added caster to aid in retaining factory alignment specs when aftermarket lift kits are installed. This reduces the darting or wandering in the vehicle's steering when 2.5"-3" lift kits are installed.
- Upper control arms combined with extended length coilover shocks will allow for up to 1" of additional wheel travel.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- 4130 chromoly tubular upper control arms are 100% bolt on and hand crafted in the U.S.A.
- CNC machined tapered spindle adapters convert the factory ball joint to a 1" uniball for added component strength & maximum wheel travel.

- TOTAL CHAOS includes 1" I.D. uniballs that feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniballs also feature a military grade PTFE woven fabric liner that helps prevent noise.
- Custom profile upper and lower hi-misalignment spacers maximize droop wheel travel and are machined from heat treated 17-4 stainless steel.
- Control arm pivots include zerk fittings to grease the urethane bushings & inner sleeves without disassembly.
- 3 stage powder coat process includes a durable clear coat to provide a long lasting finish.
- Complete Grade 8 hardware kit is included.

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

Note: 16" wheels will not fit 4Runners equipped w/ Sport Package.


Recommended Primary Shock Setup 2.5" Diameter Extended Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	883-06-130
King Shocks	KNG-25001-124A-EXT

ACCESSORIES SPECIFIC TO PART #96504

FRON1

KING 2.5" EXTENDED TRAVEL COILOVERS W/ COMPRESSION KNOBS



- Compression adjuster knobs allow user to fine tune ride for optimum performance.
- All necessary mounting brackets and hardware are included along with detailed instructions.

Part # KNG-25001-124A-EXT



EXPEDITION SERIES LOWER CONTROL ARMS - SINGLE SHOCK

STOCK LENGTH STANDARD SERIES LOWER CONTROL ARMS

component strength.

run hard in the dirt!

braking.

gussets.



Part # 86555-E-NSS

- Newly integrated steering stop tabs retain factory turning angle with no modification necessary to OEM ball joint cradles.
- Pocket added at the coilover shock tabs increases clearance allowing for a wider range of shocks to be used - up to 3.0".
- New billet CNC machined uniball cup provides more turning clearance & increases strength. Urethane bushings reduce bushing deflection
- compared to stock rubber bushings.
- Stock length replacement lower control arm.
- Vehicles with KDSS require PT#: 86555-E-KDSS-NSS



EXPEDITION SERIES LOWER CONTROL ARMS - DUAL SHOCK

Part # 86555-E

- Newly integrated steering stop tabs retain factory turning angle with no modification necessary to OEM ball joint cradles.
- Pocket added at the coilover shock tabs increases clearance allowing for a wider range of shocks to be used - up to 3.0".
- New billet CNC machined uniball cup provides more turning clearance & increases strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Stock length replacement lower control arms.
- 1.25" wheel spacers required for secondary shock mount clearance.
- Vehicles with KDSS require PT#: 86555-E-KDSS

SPINDLE GUSSET

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking.
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.

Part # 59698

1001

101

LOWER CONTROL ARM CAM TAB GUSSETS

- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
- CNC laser cut 1/8" 4130 chromoly replacement cam platers weld to the frame.
- 1/4" thick lower cam alignment tabs will not bend like factory tabs.
- Welding and grinding are required to install.

Part # 59860

10

- bushings. Pivots include zerk fittings to maintain the equipment while bolted on the vehicle. 1/4" thick steel skid plate is integrated into the
- control arm for rock crawling protection.

Must have reinforcement for anyone who wants to

Strengthens spindle uprights and prevents the

knuckle from damage during hard impacts under

Boxed arms feature replaceable urethane pivot

SPINDLE GUSSET W/ SWAYBAR MOUNTS




Part # 86500

- Part # 59698-SB
- 1/8" prebent laser cut mild steel brackets. Trucks running factory back spacing wheels must run wheel spacers.

Retains the factory sway bar and includes an

additional steering arm gusset.

Welding and grinding are required to install.





ACCESSORIES SPECIFIC TO PART #96504

FRONT

STOCK LENGTH BOLT-ON LOWER CONTROL ARM SKID PLATES

- Reduce hang-ups on the trail with factory lower control arms.
- Bolt-on steel skid plates can be welded to factory lower arm for maximum strength.

Mounting hardware is included.

KING SECONDARY SHOCKS



- Externally adjustable for both compression and rebound.
- Designed for use with TC secondary shock hoops (PN: 86610 or 86612 listed below).
- Requires a lower control arm with dual shock capability.

Part # KNG-TC1119-25

Part # 86006

Part # 86610

SECONDARY SHOCK HOOP - EXPEDITION / RACE SERIES LOWERS

- Flush mount top plate allows hoop to be used with shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation.
- Reinforces the factory coil bucket and helps reduce flex while lower profile design keeps the hoop from contacting the inner fender well.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.
- 4130 pre-bent chromoly shock hoops are designed to install secondary 2.5" bypass shocks.
- Designed for use with TC stock length Race or Expedition Series lower control arms.

SECONDARY SHOCK HOOP - STANDARD SERIES LOWERS



Part # 86612

- Flush mount top plate allows hoop to be used with shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation.
- Reinforces the factory coil bucket and helps reduce flex while lower profile design keeps the hoop from contacting the inner fender well.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.
- 4130 pre-bent chromoly shock hoops are designed to install secondary 2.5" bypass shocks.
- Lower shock mounting clevis and bump stop relocation brackets are included.
- This kit is designed to be installed with the TC 86500 Standard Series boxed lower control arms.

BODY MOUNT CHOP PLATES

- Designed to reinforce factory body mounts after the required trimming to allow the installation of larger tires.
- 1/8" thick laser cut plates.
- Welding and cutting required to install.

Part # 59850

COIL BUCKET TOWER GUSSETS



- Reduces upper coil bucket flex and double shears factory upper control arm bolt.
- Compatible only with TC UCA's or L/T kits not intended for use with factory control arms.
- Welding and grinding are required to install.



1" DIFF DROP SPACER




- Reduces inner CV angle by 3 degrees.
- Reduces friction wear and tear on stock length axle inner CV boots with auto locking hubs.
- 1" thick zinc plated steel spacers and Grade 8 hardware are included.
- Some vehicles may require additional washers to reinstall the factory skid plate.



Part # 87200

ACCESSORIES SPECIFIC TO PART #96504

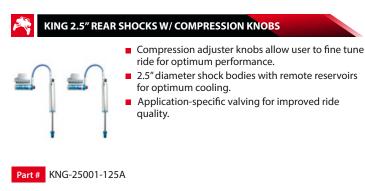



- Offers 1.5" more droop travel over stock when longer shocks are installed.
- Upper, lower and pan hard bars are designed to incorporate a heim joint making the entire rear link system length adjustable.
- 100% bolt on.

REAR WELD-ON BUMP STOP MOUNTING KIT - KING 2.0"

- Constructed from 1 1/4".375 wall 4130 chromoly tubing for maximum strength.
- Includes urethane pivot bushings.
 - Hi-misalignment spacers are included.

LOWER LINK SKIDS

Part # 48650

- Protects rear link mounts on the vehicle's frame. 100% bolt on.
 - Grade 8 9/16" mounting hardware is included. Laser cut pre bent 3/16" mild steel brackets.
- Compatible only with TC or stock links.
- Can be welded on for maximum protection.

Part # 48624K

Part # 86400

- Increase rear suspension dampening control and reduce harsh bottom outs with added weight packed in the rear of the SUV.
- Designed to reduce rear-end "bucking" sensation and the harsh bottom out with factory rubber bump stops.
- No need to remove the rear coil spring to adjust nitrogen settings like other brands.
- CNC laser cut brackets weld to the outer frame rail and offer easy access to adjust the nitrogen pressure.
- Designed to work with KING 2.0" compact threaded adjustable bump stops.
- KING bump stops offer adjustable nitrogen pressure to custom tune your vehicle for your specific use and off-road application (NOT INCLUDED with mounting kit).
- Cutting, welding, and basic fabrication are required.
- Bump stops sold separately KING PT#BS2120.

HITCH SKID

- Protects receiver and chain safety tabs from contact damage on the trail
 - Skid plate is designed to prevent hitch hang-ups while climbing or ascending in rocks and ditches
 - Features a 3/16" steel skid plate
 - Installs with any hitch pin (Not included)
 - Powder coated black

- Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually.

KING BUMP STOP 2.0" x 2.0" TRAVEL (REQUIRES PN: 48624K)

Part # KNG-BS2120



Part # 48420

SUPPORT - (951) 737 9682

100% MADE IN THE USA

5



ACCESSORIES SPECIFIC TO PART #96504

1" STAINLESS ST	EEL FK UNIBALL AND SNAP RING REPLACEMENT KIT
Part # FK-REP KIT	 1"I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. Performance parts will require periodic maintenance based on your driving habits & local conditions. Uniballs include a military grade PTFE woven fabric liner that helps prevent noise. Snap rings included. Sold as a pair.

URETHANE BUSHING KIT: UPPER CONTROL ARMS

- Complete TC upper control arm urethane replacement bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Contact our facility direct to order these items.

Part # 69000



Aids in the removal and reinstallation of a 1" uniball from any uniball cup during vehicle prep.

PREP

- Designed to be used with any hydraulic press, shop press or hammer.
- Prevents damage to new uniball during reassembly.

Part # 96006

URETHANE BUSHING KIT: LOWER CONTROL ARMS

- Complete TC lower control arm replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Inspect bushings and other equipment regularly.
- Contact our facility direct to order these items.

69770-R fits all Expedition & Race Series Part # 69770 fits all Standard Series

TC stocks all replacement parts necessary to maintain your performance equipment. Call to order today!






6

2" EXPEDITION SERIES LONG TRAVEL SYSTEM 2003 - 2009 TOYOTA 4RUNNER

PART # 86222-E [KING/FOX/RADFLO]





Kit Includes

UPPER A-ARIVIS W/ DUSHINGS & ZERK FIT HINGS
LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS
TIE-ROD EXTENSIONS
PLATED A-ARM END WASHERS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE

HI-MISALIGNMENT SPACERS

Features and Benefits

- The 2" Expedition Series kit features a redesigned lower control arm serving as an evolution of the Race Series LCA's with select features to improve component strength, function and vehicle handling.
- A newly integrated steering stop tab retains the factory turning angle with no modification necessary to the OEM ball joint cradles.
- 2" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 11.5" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.

Urethane bushings reduce bushing deflection compared to stock rubber bushings.

- Heim pivot upper control arms can be custom ordered for this kit (see page 19).
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

Note: 16" wheels will not fit 4Runners equipped w/ Sport Package.

Required Additional Parts for Installation

Part Part # Coilover Shocks See chart above TC Extended Axles (4WD MODELS) 86305

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks	TC1119-34	
Note: TC Hoon Part # 86610 is required		

Application Notes

- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- 4Runners are limited to 275/70R17 tires unless fiberglass is installed.


SUPPORT - (951) 737 9682



2" STANDARD SERIES LONG TRAVEL SYSTEM 2003 - 2009 TOYOTA 4RUNNER

PART # 86002 [KING/FOX/RADFLO]





Bolt On

Recommended Tire & Wheel Combination

Wheel combination		
Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

Note: 16" wheels will not fit 4Runners equipped
w/ Sport Package.

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86305

Kit Includes

UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS
LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS
TIE-ROD EXTENSIONS
PLATED A-ARM END WASHERS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

Features and Benefits

- 2" extended upper and lower control arms bolt to factory mounting locations. 11.5" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can be custom ordered for this kit (see page 20).

Boxed lower control arms include dual 2.5" shock tabs. Primary coil over shocks bolt into the factory coil bucket location.

- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks	TC1119-34	
Note: TC Hoop Part # 86610 is required		

Application Notes

- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- 4Runners are limited to 275/70R17 tires unless fiberglass is installed.

SUPPORT - (951) 737 9682

4RUNNER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E & 86002

FRONT

KING LONG TRAVEL COILOVERS W/ ADJUSTERS

- Long travel specific shocks add 3-4" of lift when paired with a TC long travel kit
- 2.5" diameter shocks with remote reservoirs for optimum coolina
- Compression adjuster knobs allow user to fine tune ride for optimum performance.

KNG-TC 5119-03-A Part

KING LONG TRAVEL SECONDARY SHOCKS

- Serious levels of performance are achieved when a secondary shock is used with a TC long travel kit.
- Externally adjustable for both compression and rebound.
- Designed for use with TC secondary shock hoops (PN: 88610).

KNG-TC1119-34 Part

WELD - ON SPINDLE GUSSETS

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.

59698 Part

WELD - ON UPPER COIL BUCKET TOWER GUSSETS

- Reduces upper coil bucket flex and double shears factory upper control arm bolt.
- Compatible only with TC UCA's or L/T kits, not intended for use with factory control arms.
- Welding and grinding are required to install.

Part # 59651

LT LOWER CONTROL ARM SKID PLATES +2"

- Bolt-on aluminum lower skid plates are designed to fit TC 2" long travel system lower control arms.
- Slide over rocks with an angled approach front lip.
- Grade 8 mounting hardware is included. Fits Standard Series long travel kits ONLY.

Part #

86007



Part #

59698-SB

101

SPINDLE GUSSETS WITH SWAY BAR MOUNTS

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking
- Retains the factory sway bar and includes an additional steering arm gusset.
- 1/8" prebent laser cut mild steel brackets.
- Trucks running factory back spacing wheels must run wheel spacers.
- Welding and grinding are required to install.

LOWER CONTROL ARM CAM TAB GUSSETS

- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
- CNC laser cut 1/8" 4130 chromoly replacement cam plates weld-to the frame.
- 1/4" thick lower cam alignment tabs will not bend like factory tabs.
- Welding and grinding are required for installation.

Part # 59860

DUAL SHOCK HOOPS - LONG TRAVEL ARMS



- Part # 86610
- Flush mount top plate allows hoop to be used with shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation.
- Reinforces the factory coil bucket and helps reduce flex
- 4130 prebent chromoly shock hoops are designed to install secondary 2.5" bypass shocks for maximum IFS dampening control.
- Upper shock tabs are tacked in place to aid in secondary shock location set up.
- Includes Grade 8 hardware.
- Welding and grinding are required to install.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.




LONG TRAVEL SUSPENSION

SALES GUIDE

4RUNNER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E & 86002



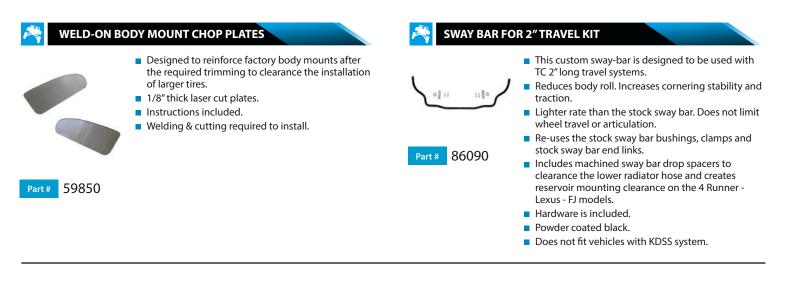



LT 4WD 4340 AXLES +2" EXTENDED

- Designed for use with TC +2" 4Runner long travel systems.
- 4340 heat treated 2" extended axle shafts and clamps are included.
- Re-uses factory Toyota inner and outer CV joints and boots.
- Axles are vehicle-specific and are not cross compatible with other Toyota models.

Part # 86305



4RUNNER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E & 86002

REAR

KING 2.5" REMOTE RESERVOIR SHOCKS w/ COMPRESSION KNOBS	A CHROMOLY ADJUSTA
 Compression adjuster knobs allow user to fine tune ride for optimum performance. 2.5" diameter shock bodies with remote reservoirs for optimum cooling. Application-specific valving for improved ride quality. 	 Offers longer Upper, incorporsystem 100% b Constructubing Include
Part # KNG-25001-125-A	Part # 86400 ■ Hi-misa



- opper, lower and pan hard bars are designed to incorporate a heim joint making the entire rear link system length adjustable.
- 100% bolt on.
 Constructed from 1 1/4".375 wall 4130 chromoly tubing for maximum strength.
- Includes urethane pivot bushings.
- Hi-misalignment spacers are included.



WELD-ON REAR BUMP STOP MOUNTS



Part # 48624K

- Increase rear suspension dampening control and reduce harsh bottom outs with added weight packed in the rear of the SUV.
- Designed to reduce rear-end "bucking" sensation and the harsh bottom out with factory rubber bump stops.
- No need to remove the rear coil spring to adjust nitrogen settings like other brands.
- CNC laser cut brackets weld to the outer frame rail and offer easy access to adjust the nitrogen pressure.
- Designed to work with KING 2.0" compact threaded adjustable bump stops.
- KING bump stops offer adjustable nitrogen pressure to custom tune your vehicle for your specific use and off-road application (NOT INCLUDED with mounting kit).
- Cutting, welding, and basic fabrication are required.
- Bump stops sold separately KING PT#BS2120.

KING BUMP STOP 2.0" x 2.0" TRAVEL (REQUIRES PN: 48624K)

- <u></u>
- Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Part # KNG-BS2120 Sold individually.

11




LONG TRAVEL SUSPENSION

SALES GUIDE

4RUNNER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E & 86002

PREP

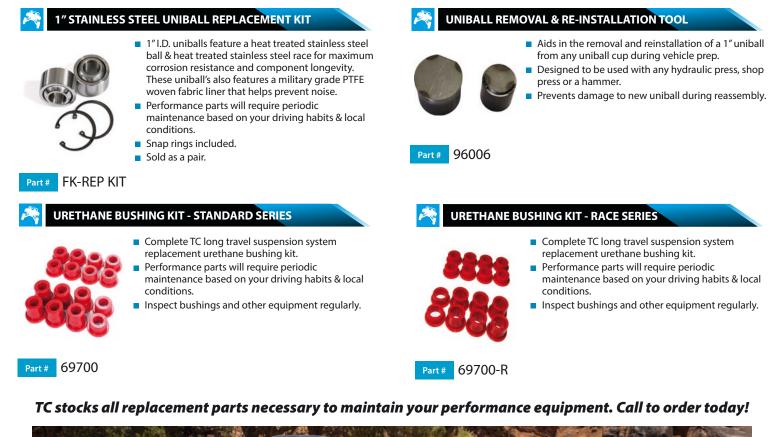




3.5" RACE SERIES LONG TRAVEL SYSTEM 2003 - 2009 TOYOTA 4RUNNER

PART # 86004-R [KING/FOX/RADFLO]





Bolt On

Recommended Tire &

Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″
Note: 16" wheels will not fit 4Runners equipped		

w/ Sport Package.

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86300
TC Extended Axles (4WD MODELS)	86300

Kit Includes

UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS
LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS

TIE-ROD EXTENSIONS

PLATED A-ARM END WASHERS

- D.O.T. BRAIDED BRAKE LINES
- 1" UNIBALLS W/ RETAINING CLIPS
- LIMIT STRAPS W/ ADJUSTERS & MOUNTS
- **GRADE 8 HARDWARE**
- HI-MISALIGNMENT SPACERS

Features and Benefits

- 100% chromoly constructed race system offers maximum ground clearance and weighs 10 pounds less than the standard TC +3.5" LT kit.
- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.

be custom ordered for this kit (see page 21).

- Boxed lower control arms include dual 2.5" shock tabs. 2.5" long travel coil over shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Heim pivot upper control arms can

Recommended Secondary Shock Setup

2.5" Diameter Long Travel Coilover Shocks		
Shock Manufacturer	Part #	
Fau Chia alua	880.00.053	

Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Primary Shock Setup

2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks TC1119-34		

Note: TC Hoop Part # 86610 is required

SUPPORT - (951) 737 9682

Application Notes


- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.


Fiberglass fenders are required to run this kit.



3.5" STANDARD SERIES LONG TRAVEL SYSTEM 2003 - 2009 TOYOTA 4RUNNER

PART # 86004 [king/fox/radflo]





Bolt On

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace	
285/75/R16	16 x 8	4.5″	
285/70/R17 17 x 8.5 4.75"			
Note: 16" wheels will not fit 4Runners equipped			

w/ Sport Package.

Kit Includes

- UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS
- TIE-ROD EXTENSIONS
- PLATED A-ARM END WASHERS
- D.O.T. BRAIDED BRAKE LINES
- 1" UNIBALLS W/ RETAINING CLIPS
- LIMIT STRAPS W/ ADJUSTERS & MOUNTS
- GRADE 8 HARDWARE
- HI-MISALIGNMENT SPACERS

Features and Benefits

- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can be custom ordered for this kit (see page 22).

- Boxed lower control arms include dual 2.5" shock tabs. Primary coil over shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks TC1119-34		

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part Part # Coilover Shocks See chart above TC Extended Axles (4WD MODELS) 86300

- Application Notes
- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.

 Fiberglass fenders are required to run this kit.

4RUNNER ACCESSORIES FOR 3.5" KITS

ACCESSORIES SPECIFIC TO PART #86004 & 86004-R

FRONT



KING LONG TRAVEL COILOVERS W/ ADJUSTERS

- Long travel specific shocks add 3-4" of lift when paired with a TC long travel kit.
- 2.5" diameter shocks with remote reservoirs for optimum cooling.
- Compression adjuster knobs allow user to fine tune ride for optimum performance.

Part # KNG-TC 5119-03-A



- Serious levels of performance are achieved when a secondary shock is used with a TC long travel kit. Externally adjustable for both compression and
- rebound.
- Designed for use with TC secondary shock hoops (PN: 88610).

KNG-TC1119-34 Part



WELD - ON SPINDLE GUSSETS

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking.
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.

59698 Part

WELD - ON UPPER COIL BUCKET TOWER GUSSETS

- Reduces upper coil bucket flex and double shears factory upper control arm bolt.
- Compatible only with TC UCA's or L/T kits, not intended for use with factory control arms.
- Welding and grinding are required to install.

Part # 59651

LT LOWER CONTROL ARM SKID PLATES +2"

- Bolt-on aluminum lower skid plates are designed to fit TC 2" long travel system lower control arms.
- Slide over rocks with an angled approach front lip.
- Grade 8 mounting hardware is included.
- Fits Standard Series long travel kits ONLY.

86007 Part

SPINDLE GUSSETS WITH SWAY BAR MOUNTS

Part #

59698-SB

1.50

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking.
- Retains the factory sway bar and includes an additional steering arm gusset.
- 1/8" prebent laser cut mild steel brackets.
- Trucks running factory back spacing wheels must run wheel spacers.
- Welding and grinding are required to install.

LOWER CONTROL ARM CAM TAB GUSSETS

- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
 - CNC laser cut 1/8" 4130 chromoly replacement cam plates weld-to the frame.
 - 101 ■ 1/4" thick lower cam alignment tabs will not bend like factory tabs.
 - Welding and grinding are required for installation.

59860 Part #

DUAL SHOCK HOOPS - LONG TRAVEL ARMS



86610

Part #

shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation.

 Reinforces the factory coil bucket and helps reduce flex.

Flush mount top plate allows hoop to be used with

- 4130 prebent chromoly shock hoops are designed to install secondary 2.5" bypass shocks for maximum IFS dampening control.
- Upper shock tabs are tacked in place to aid in secondary shock location set up.
- Includes Grade 8 hardware.
- Welding and grinding are required to install.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.



LONG TRAVEL SUSPENSION

SALES GUIDE

4RUNNER ACCESSORIES FOR 3.5" KITS

ACCESSORIES SPECIFIC TO PART #86004 & 86004-R

FRONT

in the second se	DY MOUNT CHOP PLATES
	 Designed to reinforce factory body mounts after the required trimming to clearance the installation of larger tires. 1/8" thick laser cut plates. Instructions included. Welding & cutting required to install.
Part # 59850	





LT 4WD 4340 AXLES +2" EXTENDED




- Designed for use with TC +2" 4Runner long travel systems.
- 4340 heat treated 2" extended axle shafts and clamps are included.
- Re-uses factory Toyota inner and outer CV joints and boots.
- Axles are vehicle-specific and are not cross compatible with other Toyota models.




4RUNNER ACCESSORIES FOR 3.5" KITS

ACCESSORIES SPECIFIC TO PART #86004 & 86004-R

REAR

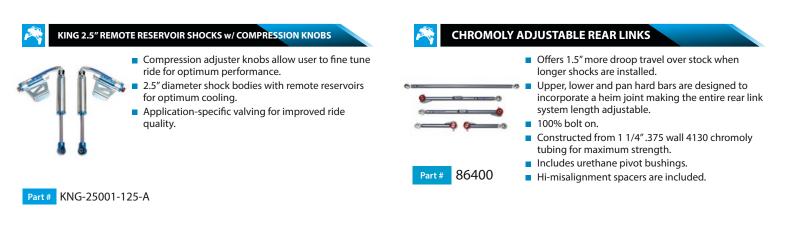

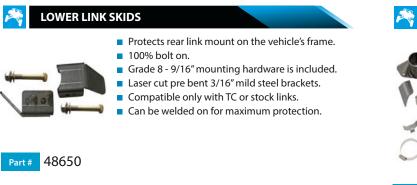

WELD-ON REAR BUMP STOP MOUNTS

Part # 48624K

- Increase rear suspension dampening control and reduce harsh bottom outs with added weight packed in the rear of the SUV.
- Designed to reduce rear-end "bucking" sensation and the harsh bottom out with factory rubber bump stops.
- No need to remove the rear coil spring to adjust nitrogen settings like other brands.
- CNC laser cut brackets weld to the outer frame rail and offer easy access to adjust the nitrogen pressure.
- Designed to work with KING 2.0" compact threaded adjustable bump stops.
- KING bump stops offer adjustable nitrogen pressure to custom tune your vehicle for your specific use and off-road application (NOT INCLUDED with mounting kit).
- Cutting, welding, and basic fabrication are required.
- Bump stops sold separately KING PT#BS2120.

KING BUMP STOP 2.0" x 2.0" TRAVEL (REQUIRES PN: 48624K)

- Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually.

Part # KNG-BS2120

TOYOTA HITCH SKID PLATE

48420

Part #

- Protects receiver and chain safety tabs from contact damage on the trail.
- Skid plate is designed to prevent hitch hang ups while climbing or ascending in rocks and ditches.
- Universal design fits all OEM Toyota receivers for: 2003+ 4Runner | 2005+ Tacoma | 2007+ Tundra | 2007+ FJ's | 2003+ Lexus GX 470/460.
- Features a 3/16" steel skid plate.
- Installs with any hitch pin (not Included).
- Powder coated black.



LONG TRAVEL SUSPENSION

SALES GUIDE

4RUNNER ACCESSORIES FOR 3.5" KITS

ACCESSORIES SPECIFIC TO PART #86004 & 86004-R

PREP

1" STAINLESS	 STEEL UNIBALL REPLACEMENT KIT 1"I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniball's also features a military grade PTFE woven fabric liner that helps prevent noise. Performance parts will require periodic maintenance based on your driving habits & local 		AL & RE-INSTALLATION TOOL Aids in the removal and reinstallation of a 1" uniball from any uniball cup during vehicle prep. Designed to be used with any hydraulic press, shop press or a hammer. Prevents damage to new uniball during reassembly.
Part # FK-REP KIT	conditions. Snap rings included. Sold as a pair.	Part # 96006	
	JSHING KIT - STANDARD SERIES	i URETHANE BUS	SHING KIT - RACE SERIES
8888 8888 88888	 Complete TC long travel suspension system replacement urethane bushing kit. Performance parts will require periodic maintenance based on your driving habits & local conditions. Inspect bushings and other equipment regularly. 	8888	 Complete TC long travel suspension system replacement urethane bushing kit. Performance parts will require periodic maintenance based on your driving habits & local conditions. Inspect bushings and other equipment regularly.
Part # 69700		Part # 69700-R	
TC sto	cks all replacement parts necessary t	o maintain your pe	erformance equipment.




2" EXPEDITION SERIES LONG TRAVEL SYSTEM W/ HEIMS 2003 - 2009 TOYOTA 4RUNNER

Kit Includes

PART # 86222-E-H [king/fox/radflo]





UPPER A-ARMS W/ HEIMS
LOWER A-ARMS W/ BUSHINGS
TIE-ROD EXTENSIONS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

HI-MISALIGNMENT SPACERS

Features and Benefits

- The 2" Expedition Series kit features a redesigned lower control arm serving as an evolution of the Race Series LCA's with select features to improve component strength, function and vehicle handling.
- A newly integrated steering stop tab retains the factory turning angle with no modification necessary to the OEM ball joint cradles.
- 2" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 11.5" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.

Heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

Note: 16" wheels will not fit 4Runners equipped w/ Sport Package.

Required Additional Parts

for Installation Part Part # Coilover Shocks See chart above TC Extended Axles (4WD MODELS) 86305

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Part #
880-06-953
KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks TC1119-34		
Note: TC Hoop Part # 86610 is required		

Application Notes

bumps.

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air

100% MADE IN THE USA


4Runners are limited to 275/70R17 tires unless fiberglass is installed.



2" STANDARD SERIES LONG TRAVEL SYSTEM W/ HEIMS 2003 - 2009 TOYOTA 4RUNNER

PART # 86002-H [KING/FOX/RADFLO]





Kit Includes
UPPER A-ARMS W/ HEIMS
LOWER A-ARMS W/ BUSHINGS
TIE-ROD EXTENSIONS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

Features and Benefits

- 2" extended upper and lower control arms bolt to factory mounting locations. 11.5" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.
- Boxed lower control arms include dual 2.5" shock tabs. Primary coil over shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Bolt On

Recommended Tire & Wheel Combination

Wheel Combination			
Tire	Wheel	Backspace	
285/75/R16 16 x 8 4.5"			
285/70/R17 17 x 8.5 4.75"			
Note: 16" wheels will not fit 4Runners equipped			

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86305

Application Notes

- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

4Runners are limited to 275/70R17 tires unless fiberglass is installed.


Recommended Primary Shock Setup

2.5" Diameter Long Travel Collover Shocks		
Shock Manufacturer Part #		
Fox Shocks	880-06-953	
King Shocks	KNG-TC 5119-03-A	

3.5" RACE SERIES LONG TRAVEL SYSTEM W/ HEIMS 2003 - 2009 TOYOTA 4RUNNER

PART # 86004-R-H [king/fox/radflo]





Kit Includes UPPER A-ARMS W/ HEIMS LOWER A-ARMS W/ BUSHINGS TIE-ROD EXTENSIONS D.O.T. BRAIDED BRAKE LINES 1" UNIBALLS W/ RETAINING CLIPS

LIMIT STRAPS W/ ADJUSTERS & MOUNTS

GRADE 8 HARDWARE

HI-MISALIGNMENT SPACERS

Features and Benefits

- 100% chromoly constructed race system offers maximum ground clearance and weighs 10 pounds less than the standard TC +3.5" LT kit.
- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.

- Boxed lower control arms include dual 2.5" shock tabs. Primary coil over shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

Note: 16" wheels will not fit 4Runners equipped w/ Sport Package.

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks TC1119-34	
Note: TC Hoop Part # 86610 is required	

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86300


- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.



3.5" STANDARD SERIES LONG TRAVEL SYSTEM W/ HEIMS 2003 - 2009 TOYOTA 4RUNNER

PART # 86004-H [king/fox/radflo]





ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

Note: 16" wheels will not fit 4Runners equipped w/ Sport Package.

LOWER A-ARMS W/ BUSHINGS TIE-ROD EXTENSIONS D.O.T. BRAIDED BRAKE LINES 1" UNIBALLS W/ RETAINING CLIPS

UPPER A-ARMS W/ HEIMS

Kit Includes

LIMIT STRAPS W/ ADJUSTERS & MOUNTS

GRADE 8 HARDWARE

HI-MISALIGNMENT SPACERS

Features and Benefits

- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.
- Boxed lower control arms include dual 2.5" shock tabs. Primary coil over shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34
Nata TC Haan Davt # 86610 is required	

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86300

Application Notes

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.