



BUILT FOR TRAVEL

UCA & LONG TRAVEL SUSPENSION **SALES GUIDE**



STOCK LENGTH UPPER CONTROL ARMS 2010+ FJ CRUISER

A

PART # 96504



	Travel	Lift	Track Increase
Ī	1" additional	2-3"	0"



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Optional Heim Pivot Upgrade

- Designed for use on 6" or higher drop bracket lift kits.
- TC includes 3/4" chromoly heim joints for the pivots.
- Heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.

WITH Includes UPPER A-ARMS W/ BUSHINGS PLATED END WASHERS 1" UNIBALLS W/ RETAINING CLIPS GRADE 8 HARDWARE GREASE FITTINGS TAPERED SPINDLE ADAPTERS

Features and Benefits

- UCA's are designed with added caster to aid in retaining factory alignment specs when aftermarket lift kits are installed. This reduces the darting or wandering in the vehicle's steering when 2.5″-3″ lift kits are installed.
- Upper control arms combined with extended length coil over shocks will allow for up to 1" of additional wheel travel.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- 4130 chromoly tubular upper control arms are 100% bolt on and hand crafted in the U.S.A.
- CNC machined tapered spindle adapters convert the factory ball joint to a 1" uniball for added component strength & maximum wheel travel.

- TOTAL CHAOS includes 1"I.D. uniballs that feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniballs also feature a military grade PTFE woven fabric liner that helps prevent noise.
- Custom profile upper and lower hi-misalignment spacers maximize droop wheel travel and are machined from heat treated 17-4 stainless steel.
- Control arm pivots include zerk fittings to grease the urethane bushings & inner sleeves without disassembly.
- 3 stage powder coat process includes a durable clear coat to provide a long lasting finish.
- Complete Grade 8 hardware kit is included.

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Extended Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	883-06-130
King Shocks	KNG-25001-133A-EXT

SUPPORT - (951) 737 9682



ACCESSORIES SPECIFIC TO PART #96504

FRONT



KING 2.5" EXTENDED TRAVEL COILOVERS W/ COMPRESSION KNOBS



- Adjustable ride height ranging from 2"-3" of lift.
- 1" extra droop wheel travel when combined with 96504 upper control arms.
- Compression adjuster knobs allow user to fine tune ride for optimum performance.
- All necessary mounting brackets and hardware are included along with detailed instructions.

Part # KNG-25001-133A-EXT





EXPEDITION SERIES LOWER CONTROL ARMS - SINGLE SHOCK



- Newly integrated steering stop tabs retain factory turning angle with no modification necessary to OEM ball joint cradles.
- Pocket added at the coilover shock tabs increases clearance allowing for a wider range of shocks to be used - up to 3.0".
- New billet CNC machined uniball cup provides more turning clearance & increases strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Stock length replacement lower control arm.

Part # 86555-E-NSS

Vehicles with KDSS require PT#: 86555-E-KDSS-NSS



EXPEDITION SERIES LOWER CONTROL ARMS - DUAL SHOCK



Part # 86555-E

- Newly integrated steering stop tabs retain factory turning angle with no modification necessary to OEM ball joint cradles.
- Pocket added at the coilover shock tabs increases clearance allowing for a wider range of shocks to be used - up to 3.0".
- New billet CNC machined uniball cup provides more turning clearance & increases strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Stock length replacement lower control arms.
- 1.25" wheel spacers required for secondary shock mount clearance.
- Vehicles with KDSS require PT#: 86555-E-KDSS



STOCK LENGTH STANDARD SERIES LOWER CONTROL ARMS



Part # 86500

- Features a two-bolt billet machined uniball adapter. Lower ball joints are upgraded to a 1" stainless steel uniball for maximum wheel travel and added component strength.
- 3/16" main body stock length fully boxed lower control arms are CNC laser cut and include internal
- Boxed arms feature replaceable urethane pivot bushings. Pivots include zerk fittings to maintain the equipment while bolted on the vehicle.
- 1/4" thick steel skid plate is integrated into the control arm for rock crawling protection.



SPINDLE GUSSET



- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.

Part # 59698



SPINDLE GUSSET W/ SWAYBAR MOUNTS



Part # 59698-SB

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under
- Retains the factory sway bar and includes an additional steering arm gusset.
- 1/8" prebent laser cut mild steel brackets.
- Trucks running factory back spacing wheels must run wheel spacers.
- Welding and grinding are required to install.



LOWER CONTROL ARM CAM TAB GUSSETS











- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
- CNC laser cut 1/8" 4130 chromoly replacement cam platers weld to the frame.
- 1/4" thick lower cam alignment tabs will not bend like factory tabs.
- Welding and grinding are required to install.



ACCESSORIES SPECIFIC TO PART #96504

FRONT



1" DIFF DROP SPACER



- Reduces inner CV angle by 3 degrees.
- Reduces friction wear and tear on stock length axle inner CV boots with auto locking hubs.
- 1" thick zinc plated steel spacers and Grade 8 hardware are included.
- Some vehicles may require additional washers to reinstall the factory skid plate.



KING SECONDARY SHOCKS



- Externally adjustable for both compression and
- Designed for use with TC secondary shock hoops (PN: 86610 or 86612 listed above).
- Requires a lower control arm with dual shock

Part # KNG-TC1119-25

Part # 87200

SECONDARY SHOCK HOOP - EXPEDITION / RACE SERIES LOWERS



shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation.

■ Flush mount top plate allows hoop to be used with

- Reinforces the factory coil bucket and helps reduce flex while lower profile design keeps the hoop from contacting the inner fender well.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.
- 4130 pre-bent chromoly shock hoops are designed to install secondary 2.5" bypass shocks.
- Designed for use with TC stock length Race or Expedition Series lower control arms.



SECONDARY SHOCK HOOP - STANDARD SERIES LOWERS



eliminates the need to trim the inner fender well for rear bolt installation. Reinforces the factory coil bucket and helps reduce

■ Flush mount top plate allows hoop to be used with

shocks that use bolts or studs on upper mount and

- flex while lower profile design keeps the hoop from contacting the inner fender well. Maximize vehicle dampening control when you
- install a dual 2.5" shock mount system. 4130 pre-bent chromoly shock hoops are designed
- to install secondary 2.5" bypass shocks. Lower shock mounting clevis and bump stop relocation brackets are included.
- This kit is designed to be installed with the TC 86500 Standard boxed lower control arms.



Part # 86612

Part # 86610

BODY MOUNT CHOP PLATES



- Designed to reinforce factory body mounts after the required trimming to allow the installation of larger tires.
- 1/8" thick laser cut plates.
- Welding and cutting required to install.





ACCESSORIES SPECIFIC TO PART #96504



KING 2.5" REAR SHOCKS W/ COMPRESSION KNOBS



- Compression adjuster knobs allow user to fine tune ride for optimum performance.
- 2.5" diameter shock bodies with remote reservoirs for optimum cooling.
- Application-specific valving for improved ride

Part # KNG-25001-279A



CHROMOLY ADJUSTABLE REAR LINKS



86400

longer shocks are installed. Upper, lower and pan hard bars are designed to incorporate a heim joint making the entire rear link

Offers 1.5" more droop travel over stock when

- system length adjustable. 100% bolt on.
- Constructed from 1 1/4".375 wall 4130 chromoly tubing for maximum strength.
- Includes urethane pivot bushings.

packed in the rear of the SUV.

Hi-misalignment spacers are included.



LOWER LINK SKIDS

- Protects rear link mounts on the vehicle's frame.
- 100% bolt on.
- Grade 8 9/16" mounting hardware is included.
- Laser cut pre bent 3/16" mild steel brackets.
- Compatible only with TC or stock links.
- Can be welded on for maximum protection.

Part # 48650





REAR WELD-ON BUMP STOP MOUNTING KIT - KING 2.0"

bump stops.



Part # 48624K

No need to remove the rear coil spring to adjust nitrogen settings like other brands.

■ Increase rear suspension dampening control and reduce harsh bottom outs with added weight

Designed to reduce rear-end "bucking" sensation

and the harsh bottom out with factory rubber

- CNC laser cut brackets weld to the outer frame rail and offer easy access to adjust the nitrogen
- Designed to work with KING 2.0" compact threaded adjustable bump stops.
- KING bump stops offer adjustable nitrogen pressure to custom tune your vehicle for your specific use and off-road application (NOT INCLUDED with mounting kit).
- Cutting, welding, and basic fabrication are required.
- Bump stops sold separately KING PT#BS2120.



KING BUMP STOP 2.0" x 2.0" TRAVEL (REQUIRES PN: 48624K)



- Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually.

Part # KNG-BS2120



HITCH SKID



- Protects receiver and chain safety tabs from contact damage on the trail.
- Skid plate is designed to prevent hitch hang-ups while climbing or ascending in rocks and ditches.
- Features a 3/16" steel skid plate.
- Installs with any hitch pin (not included).
- Powder coated black.



ACCESSORIES SPECIFIC TO PART #96504





1" STAINLESS STEEL FK UNIBALL AND SNAP RING REPLACEMENT KIT



- 1″I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity.
- Performance parts will require periodic maintenance based on your driving habits & local
- Uniballs include a military grade PTFE woven fabric liner that helps prevent noise.
- Snap rings included.
- Sold as a pair.



Part # 96006



1" UNIBALL REMOVAL / INSTALL TOOL

■ Aids in the removal and reinstallation of a 1" uniball from any uniball cup during vehicle prep.

- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Designed to be used with any hydraulic press, shop press or hammer.
- Prevents damage to new uniball during reassembly.

Part # 69000

Part # FK-REP KIT

URETHANE BUSHING KIT: UPPER CONTROL ARMS



- Complete TC upper control arm urethane replacement bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local
- Contact our facility direct to order these items.



URETHANE BUSHING KIT: LOWER CONTROL ARMS



- Complete TC lower control arm replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local
- Inspect bushings and other equipment regularly.
- Contact our facility direct to order these items.

69770-R fits all Expedition & Race Series 69770 fits all Standard Series


TC stocks all replacement parts necessary to maintain your performance equipment. Call to order today!





2" EXPEDITION SERIES LONG TRAVEL SYSTEM 2010+ TOYOTA FJ CRUISER

PART # 86222-E-10FJ [KING/FOX/RADFLO]



Travel	Lift	Track Increase
11.5"	3-4"	4"



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Includes
UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS
LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS
TIE-ROD EXTENSIONS
PLATED A-ARM END WASHERS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

Features and Benefits

- The 2" Expedition Series kit features a redesigned lower control arm serving as an evolution of the Race Series LCA's with select features to improve component strength, function and vehicle handling.
- A newly integrated steering stop tab retains the factory turning angle with no modification necessary to the OEM ball joint cradles.
- 2" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 11.5" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.

- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can be custom ordered for this kit (see page 18).
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86305T

Application Notes

- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.


Fiberglass fenders not required on FJ Cruisers.



2" STANDARD SERIES LONG TRAVEL SYSTEM 2010+ TOYOTA FJ CRUISER



PART # 86002-10FJ [KING/FOX/RADFLO]



Travel	Lift	Track Increase
11.5"	3-4"	4"



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Includes UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS TIE-ROD EXTENSIONS PLATED A-ARM END WASHERS D.O.T. BRAIDED BRAKE LINES 1"UNIBALLS W/ RETAINING CLIPS LIMIT STRAPS W/ ADJUSTERS & MOUNTS

Features and Benefits

GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

- 2" extended upper and lower control arms bolt to factory mounting locations. 11.5" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can be custom ordered for this kit (see page 19).

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86305

Application Notes

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders not required on FJ Cruisers.



FJ CRUISER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E-10FJ & 86002-10FJ

FRONT



KING LONG TRAVEL COILOVERS W/ ADJUSTERS



- Long travel specific shocks add 3-4" of lift when paired with a TC long travel kit.
- 2.5" diameter shocks with remote reservoirs for optimum cooling.
- Compression adjuster knobs allow user to fine tune ride for optimum performance.



KING LONG TRAVEL SECONDARY SHOCKS



- Serious levels of performance are achieved when a secondary shock is used with a TC long travel kit.
- Externally adjustable for both compression and
- Designed for use with TC secondary shock hoops (PN: 88610).

TC 5119-03-A



KNG-TC1119-34



WELD - ON SPINDLE GUSSETS



- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.



59698



SPINDLE GUSSETS WITH SWAY BAR MOUNTS



- Must have reinforcement for anyone who wants to run hard in the dirt! Strengthens spindle uprights and prevents the
- knuckle from damage during hard impacts under
- Retains the factory sway bar and includes an additional steering arm gusset.
- 1/8" prebent laser cut mild steel brackets.
- Trucks running factory back spacing wheels must run wheel spacers.
- Welding and grinding are required to install.





WELD - ON UPPER COIL BUCKET TOWER GUSSETS



- Reduces upper coil bucket flex and double shears factory upper control arm bolt.
- Compatible only with TC UCA's or L/T kits, not intended for use with factory control arms.
- Welding and grinding are required to install.



LOWER CONTROL ARM CAM TAB GUSSETS







59698-SB





59860

- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front CNC laser cut 1/8" 4130 chromoly replacement cam
- plates weld-to the frame. 1/4" thick lower cam alignment tabs will not bend
- like factory tabs.
- Welding and grinding are required for installation.

Part #

59653



LT LOWER CONTROL ARM SKID PLATES +2"



- Bolt-on aluminum lower skid plates are designed to fit TC 2" long travel system lower control arms.
- Slide over rocks with an angled approach front lip.
- Grade 8 mounting hardware is included.
- Fits Standard Series long travel kits ONLY.



- **DUAL SHOCK HOOPS LONG TRAVEL ARMS**
 - Flush mount top plate allows hoop to be used with shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation. ■ Reinforces the factory coil bucket and helps reduce

 - 4130 prebent chromoly shock hoops are designed to install secondary 2.5" bypass shocks for maximum IFS dampening control.
 - Upper shock tabs are tacked in place to aid in secondary shock location set up.
 - Includes Grade 8 hardware.
 - Welding and grinding are required to install.
 - Maximize vehicle dampening control when you install a dual 2.5" shock mount system.



SWAY BAR FOR 2"TRAVEL KIT



FJ CRUISER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E-10FJ & 86002-10FJ

FRONT



WELD-ON BODY MOUNT CHOP PLATES



 Designed to reinforce factory body mounts after the required trimming to clearance the installation of larger tires.

- 1/8" thick laser cut plates.
- Instructions included.
- Welding & cutting required to install.



Part # 86090

■ This custom sway-bar is designed to be used with TC 2" long travel systems.

Reduces body roll. Increases cornering stability and

Lighter rate than the stock sway bar. Does not limit wheel travel or articulation.

Re-uses the stock sway bar bushings, clamps and stock sway bar end links.

Includes machined sway bar drop spacers to clearance the lower radiator hose and creates reservoir mounting clearance on the 4 Runner -Lexus - FJ models.

- Hardware is included.
- Powder coated black.
- Does not fit vehicles with KDSS system.



Part # 59850

4WD



LT 4WD 4340 AXLES +2" EXTENDED



- Designed for use with TC +2" 4Runner long travel
- 4340 heat treated 2" extended axle shafts and clamps are included.
- Re-uses factory Toyota inner and outer CV joints and boots.
- Axles are vehicle-specific and are not cross compatible with other Toyota models.







FJ CRUISER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E-10FJ & 86002-10FJ

REAR



KING 2.5" REMOTE RESERVOIR SHOCKS w/ COMPRESSION KNOBS



- Compression adjuster knobs allow user to fine tune ride for optimum performance.
- 2.5" diameter shock tubes with remote reservoirs for optimum cooling.
- Application-specific valving for improved ride



CHROMOLY ADJUSTABLE REAR LINKS





86400

- Upper, lower and pan hard bars are designed to incorporate a heim joint making the entire rear link system length adjustable.
- 100% bolt on.
- Constructed from 1 1/4".375 wall 4130 chromoly tubing for maximum strength.
- Includes urethane pivot bushings.
- Hi-misalignment spacers are included.

Part # KNG-25001-279A



LOWER LINK SKIDS

- Protects rear link mount on the vehicle's frame.
- 100% bolt on.
- Grade 8 9/16" mounting hardware is included.
- Laser cut pre bent 3/16" mild steel brackets.
- Compatible only with TC or stock links.
- Can be welded on for maximum protection.



48650



WELD-ON REAR BUMP STOP MOUNTS



Part # 48624K

- Increase rear suspension dampening control and reduce harsh bottom outs with added weight packed in the rear of the SUV.
- Designed to reduce rear-end "bucking" sensation and the harsh bottom out with factory rubber bump stops.
- No need to remove the rear coil spring to adjust nitrogen settings like other brands.
- CNC laser cut brackets weld to the outer frame rail and offer easy access to adjust the nitrogen pressure.
- Designed to work with KING 2.0" compact threaded adjustable bump stops.
- KING bump stops offer adjustable nitrogen pressure to custom tune your vehicle for your specific use and off-road application (NOT INCLUDED with mounting kit).
- Cutting, welding, and basic fabrication are required.
- Bump stops sold separately KING PT#BS2120.



KING BUMP STOP 2.0" x 2.0" TRAVEL (REQUIRES PN: 48624K)



- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually.



Part # KNG-BS2120



TOYOTA HITCH SKID PLATE



- Protects receiver and chain safety tabs from contact damage on the trail.
- Skid plate is designed to prevent hitch hang ups while climbing or ascending in rocks and ditches.
- Universal design fits all OEM Toyota receivers for: 2003+ 4Runner | 2005+ Tacoma | 2007+ Tundra | 2007+ FJ's | 2003+ Lexus GX 470/460
- Features a 3/16" steel skid plate.
- Installs with any hitch pin (not Included).
- Powder coated black.



FJ CRUISER ACCESSORIES FOR 2" KITS

ACCESSORIES SPECIFIC TO PART #86222-E-10FJ & 86002-10FJ





1" STAINLESS STEEL UNIBALL REPLACEMENT KIT



- 1″ I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniballs also features a military grade PTFE woven fabric liner that helps prevent noise.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Snap rings included.
- Sold as a pair.

Part # FK-REP KIT



UNIBALL REMOVAL & RE-INSTALLATION TOOL





- Aids in the removal and reinstallation of a 1" uniball from any uniball cup during vehicle prep.
- Designed to be used with any hydraulic press, shop press or a hammer.
- Prevents damage to new uniball during reassembly.

Part # 96006



URETHANE BUSHING KIT - STANDARD SERIES



- Complete TC long travel suspension system replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local
- Inspect bushings and other equipment regularly.




URETHANE BUSHING KIT - RACE SERIES



- Complete TC long travel suspension system replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local
- Inspect bushings and other equipment regularly.

Part # 69700


Part # 69700-R

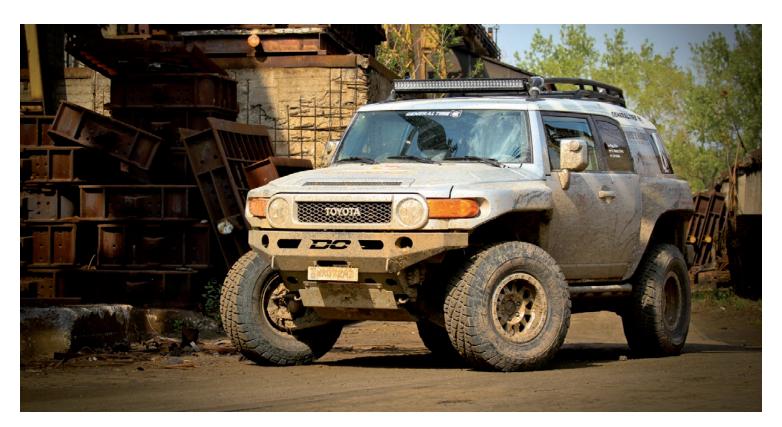



3.5" RACE SERIES LONG TRAVEL SYSTEM 2010+ TOYOTA FJ CRUISER

PART # 86004-R-10FJ [KING/FOX/RADFLO]



Travel	Lift	Track Increase
13"	3-4"	7″



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Includes UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS TIE-ROD EXTENSIONS PLATED A-ARM END WASHERS D.O.T. BRAIDED BRAKE LINES 1"UNIBALLS W/ RETAINING CLIPS LIMIT STRAPS W/ ADJUSTERS & MOUNTS GRADE 8 HARDWARE HI-MISALIGNMENT SPACERS

Features and Benefits

- 100% chromoly constructed race system offers maximum ground clearance and weighs 10 pounds less than the standard TC +3.5"LT kit.
- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can

- be custom ordered for this kit (see page 20).
- Boxed lower control arms include dual 2.5" shock tabs. 2.5" long travel coil over shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86300

Application Notes

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.

 Fiberglass fenders are required to run this kit.



3.5" STANDARD SERIES LONG TRAVEL SYSTEM 2010+ TOYOTA FJ CRUISER



PART # 86004-10FJ [KING/FOX/RADFLO]



Travel	Lift	Track Increase
13"	3-4"	7"



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Includes UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS TIE-ROD EXTENSIONS PLATED A-ARM END WASHERS D.O.T. BRAIDED BRAKE LINES 1"UNIBALLS W/ RETAINING CLIPS LIMIT STRAPS W/ ADJUSTERS & MOUNTS GRADE 8 HARDWARE HI-MISALIGNMENT SPACERSE

Features and Benefits

- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Heim pivot upper control arms can be custom ordered for this kit (see page 21).
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86300

Application Notes

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.



FJ CRUISER ACCESSORIES FOR 3.5" KITS

ACCESSORIES SPECIFIC TO PART #86004-10FJ & 86004-R-10FJ

FRONT



KING LONG TRAVEL COILOVERS W/ ADJUSTERS



- Long travel specific shocks add 3-4" of lift when paired with a TC long travel kit
- 2.5" diameter shocks with remote reservoirs for optimum cooling
- Compression adjuster knobs allow user to fine tune ride for optimum performance.



KING LONG TRAVEL SECONDARY SHOCKS



- Serious levels of performance are achieved when a secondary shock is used with a TC long travel kit.
- Externally adjustable for both compression and
- Designed for use with TC secondary shock hoops (PN: 88610).

Must have reinforcement for anyone who wants to

knuckle from damage during hard impacts under

Strengthens spindle uprights and prevents the

Retains the factory sway bar and includes an

Trucks running factory back spacing wheels must

1/8" prebent laser cut mild steel brackets.

■ Welding and grinding are required to install.

additional steering arm gusset.

KNG-TC 5119-03-A



KNG-TC1119-34



WELD - ON SPINDLE GUSSETS



- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.



59698



WELD - ON UPPER COIL BUCKET TOWER GUSSETS



- Reduces upper coil bucket flex and double shears factory upper control arm bolt.
- Compatible only with TC UCA's or L/T kits, not intended for use with factory control arms.
- Welding and grinding are required to install.



LOWER CONTROL ARM CAM TAB GUSSETS

SPINDLE GUSSETS WITH SWAY BAR MOUNTS

run hard in the dirt!

run wheel spacers.





59698-SB







59860

- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
- CNC laser cut 1/8" 4130 chromoly replacement cam plates weld-to the frame.
- 1/4" thick lower cam alignment tabs will not bend like factory tabs.
- Welding and grinding are required for installation.



59653



LT LOWER CONTROL ARM SKID PLATES +2"




- Bolt-on aluminum lower skid plates are designed to fit TC 2" long travel system lower control arms.
- Slide over rocks with an angled approach front lip.
- Grade 8 mounting hardware is included.
- Fits Standard Series long travel kits ONLY.



Part # 86610

DUAL SHOCK HOOPS - LONG TRAVEL ARMS



- 4130 prebent chromoly shock hoops are designed to install secondary 2.5" bypass shocks for maximum IFS dampening control.
- Upper shock tabs are tacked in place to aid in secondary shock location set up.
- Includes Grade 8 hardware.
- Welding and grinding are required to install.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.



86007



FJ CRUISER ACCESSORIES FOR 3.5" KITS

ACCESSORIES SPECIFIC TO PART #86004-10FJ & 86004-R-10FJ

4WD



WELD-ON BODY MOUNT CHOP PLATES



- Designed to reinforce factory body mounts after the required trimming to clearance the installation of larger tires.
- 1/8" thick laser cut plates.
- Instructions included.
- Welding & cutting required to install.


Part # 59850



4WD



LT 4WD 4340 AXLES +2" EXTENDED





- 4340 heat treated 2" extended axle shafts and clamps are included.
- Re-uses factory Toyota inner and outer CV joints
- Axles are vehicle-specific and are not cross compatible with other Toyota models.





FJ CRUISER ACCESSORIES FOR 3.5" KITS

ACCESSORIES SPECIFIC TO PART #86004-10FJ & 86004-R-10FJ






KING 2.5" REMOTE RESERVOIR SHOCKS w/ COMPRESSION KNOBS



- Compression adjuster knobs allow user to fine tune ride for optimum performance.
- 2.5" diameter shock bodies with remote reservoirs for optimum cooling.
- Application-specific valving for improved ride quality.



CHROMOLY ADJUSTABLE REAR LINKS





86400

- Upper, lower and pan hard bars are designed to incorporate a heim joint making the entire rear link system length adjustable.
- 100% bolt on.
- Constructed from 1 1/4".375 wall 4130 chromoly tubing for maximum strength.
- Includes urethane pivot bushings.
- Hi-misalignment spacers are included.

Part # KNG-25001-125A



LOWER LINK SKIDS





- Grade 8 9/16" mounting hardware is included.
- Laser cut pre bent 3/16" mild steel brackets.
- Compatible only with TC or stock links.
- Can be welded on for maximum protection.





48650



WELD-ON REAR BUMP STOP MOUNTS



Part #

48624K

- Increase rear suspension dampening control and reduce harsh bottom outs with added weight packed in the rear of the SUV.
 Designed to reduce rear-end "bucking" sensation
- Designed to reduce rear-end "bucking" sensation and the harsh bottom out with factory rubber bump stops.
- No need to remove the rear coil spring to adjust nitrogen settings like other brands.
- CNC laser cut brackets weld to the outer frame rail and offer easy access to adjust the nitrogen pressure.
- Designed to work with KING 2.0" compact threaded adjustable bump stops.
- KING bump stops offer adjustable nitrogen pressure to custom tune your vehicle for your specific use and off-road application (NOT INCLUDED with mounting kit).
- Cutting, welding, and basic fabrication are required.
- Bump stops sold separately KING PT#BS2120.



KING BUMP STOP 2.0" x 2.0" TRAVEL (REQUIRES PN: 48624K)



- Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually.





TOYOTA HITCH SKID PLATE



- Protects receiver and chain safety tabs from contact damage on the trail.
- Skid plate is designed to prevent hitch hang ups while climbing or ascending in rocks and ditches.
- Universal design fits all OEM Toyota receivers for: 2003+ 4Runner | 2005+ Tacoma | 2007+ Tundra | 2007+ FJ's | 2003+ Lexus GX 470/460
- Features a 3/16" steel skid plate.
- Installs with any hitch pin (not Included).
- Powder coated black.

Part #

48420



PREP



1" STAINLESS STEEL UNIBALL REPLACEMENT KIT



- 1"I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniball's also features a military grade PTFE woven fabric liner that helps prevent noise.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Snap rings included.
- Sold as a pair.

Part # FK-REP KIT



URETHANE BUSHING KIT - STANDARD SERIES



- Complete TC long travel suspension system replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local
- Inspect bushings and other equipment regularly.



UNIBALL REMOVAL & RE-INSTALLATION TOOL





- Aids in the removal and reinstallation of a 1" uniball from any uniball cup during vehicle prep.
- Designed to be used with any hydraulic press, shop press or a hammer.
- Prevents damage to new uniball during reassembly.

96006



URETHANE BUSHING KIT - RACE SERIES



- Complete TC long travel suspension system replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local
- Inspect bushings and other equipment regularly.

Part # 69700

Part # 69700-R

TC stocks all replacement parts necessary to maintain your performance equipment.





2" EXPEDITION SERIES LONG TRAVEL SYSTEM W/ HEIMS 2010+ TOYOTA FJ CRUISER



PART # 86222-E-H-10FJ [KING/FOX/RADFLO]



Travel	Lift	Track Increase
11.5"	3-4"	4"



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Includes
UPPER A-ARMS W/ HEIMS
LOWER A-ARMS W/ BUSHINGS
TIE-ROD EXTENSIONS
D.O.T. BRAIDED BRAKE LINES
1"UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

Features and Benefits

- The 2" Expedition Series kit features a redesigned lower control arm serving as an evolution of the Race Series LCA's with select features to improve component strength, function and vehicle handling.
- A newly integrated steering stop tab retains the factory turning angle with no modification necessary to the OEM ball joint cradles.
- 2" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 11.5" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.

- Heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86305

Application Notes

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.

 Fiberglass fenders not required on FJ Cruisers.



2" STANDARD SERIES LONG TRAVEL SYSTEM W/ HEIMS 2010+ TOYOTA FJ CRUISER



PART # 86002-H-10FJ [KING/FOX/RADFLO]



Travel	Lift	Track Increase
11.5"	3-4"	4"



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Includes
UPPER A-ARMS W/ HEIMS
LOWER A-ARMS W/ BUSHINGS
TIE-ROD EXTENSIONS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

Features and Benefits

- 2" extended upper and lower control arms bolt to factory mounting locations. 11.5" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86305

Application Notes


- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders not required on FJ Cruisers.



3.5" RACE SERIES LONG TRAVEL SYSTEM W/ HEIMS 2010+ TOYOTA FJ CRUISER

P

PART # 86004-R-H-10FJ [king/fox/radflo]



Travel	Lift	Track Increase
13″	3-4"	7"



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Ir	cludes	
UPPE	R A-ARMS W/ HEIMS	
LOW	R A-ARMS W/ BUSHINGS	
TIE-R	DD EXTENSIONS	
D.O.T	BRAIDED BRAKE LINES	
1" UN	IBALLS W/ RETAINING CLIPS	
LIMIT	STRAPS W/ ADJUSTERS & MOUNTS	
GRAI	E 8 HARDWARE	
HI-M	SALIGNMENT SPACERS	

Features and Benefits

- 100% chromoly constructed race system offers maximum ground clearance and weighs 10 pounds less than the standard TC +3.5" LT kit.
- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.

- Boxed lower control arms include dual 2.5" shock tabs. 2.5" long travel coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86300

Application Notes

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.



3.5" STANDARD SERIES LONG TRAVEL SYSTEM W/ HEIMS 2010+ TOYOTA FJ CRUISER



PART # 86004-H-10FJ [KING/FOX/RADFLO]



Travel	Lift	Track Increase
13″	3-4"	7″



INSTALLATION INSTRUCTIONS



ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

Kit Includes	
UPPER A-ARMS W/ HEIMS	
LOWER A-ARMS W/ BUSHII	NGS
TIE-ROD EXTENSIONS	
D.O.T. BRAIDED BRAKE LIN	ES
1" UNIBALLS W/ RETAINING	CLIPS
LIMIT STRAPS W/ ADJUSTE	RS & MOUNTS
GRADE 8 HARDWARE	
HI-MISALIGNMENT SPACE	RS

Features and Benefits

- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16x8	4.5"
285/70/R17	17 x 8.5	4.75"

Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS)	86300

Application Notes

- Suspension travel varies on every vehicle.
 Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.