



# BUILT FOR **TRAVEL**

UCA & LONG TRAVEL SUSPENSION SALES GUIDE



### **STOCK LENGTH UPPER CONTROL ARMS** 2016+ TACOMA 4WD / PRERUNNER - 6 LUG

#### 🛜 PART # 96504



Travel	Lift	Track Increase
1" additional	2-3″	0″
INSTALLATIO	N INSTRUCTION	NS

ADDITIONAL PRODUCT INFO & IMAGES

Bolt On

#### **Optional Heim Pivot Upgrade**

- Designed for use on 6" or higher drop bracket lift kits.
- TC includes 3/4" chromoly heim joints for the pivots.
- Heim upper control arms

#### Kit Includes UPPER A-ARMS W/ BUSHINGS PLATED END WASHERS 1" UNIBALLS W/ RETAINING CLIPS

- GRADE 8 HARDWARE
- GREASE FITTINGS

TAPERED SPINDLE ADAPTERS

#### Features and Benefits

- UCA's are designed with added caster to aid in retaining factory alignment specs when aftermarket lift kits are installed. This reduces the darting or wandering in the vehicle's steering when 2.5"-3" lift kits are installed.
- Upper control arms combined with extended length coilover shocks will allow for up to 1" of additional wheel travel.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- 4130 chromoly tubular upper control arms are 100% bolt on and hand crafted in the U.S.A.
- CNC machined tapered spindle adapters convert the factory ball joint to a 1" uniball for added component strength & maximum wheel travel.

- TOTAL CHAOS includes 1" I.D. uniballs that feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniballs also feature a military grade PTFE woven fabric liner that helps prevent noise.
- Custom profile upper and lower hi-misalignment spacers maximize droop wheel travel and are machined from heat treated 17-4 stainless steel.
- Control arm pivots include zerk fittings to grease the urethane bushings & inner sleeves without disassembly.
- 3 stage powder coat process includes a durable clear coat to provide a long lasting finish.
- Complete Grade 8 hardware kit is included.

**Recommended Tire & Wheel Combination** 

are fully adjustable to allow

maximum tuning of caster

and camber.

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

### Recommended Primary Shock Setup 2.5" Diameter Extended Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-418
King Shocks	KNG-25001-119A-EXT

#### SUPPORT - (951) 737 9682

### TOYOTA TACOMA STOCK LENGTH ACCESSORIES ACCESSORIES SPECIFIC TO PART #96504

OBS

### FRON<sup>-</sup>

2	KING 2.5" EXTENDED TRAVEL COILOVERS W/ COMPRESSION KNO
	Adjustable ride height ranging from 2"

- "-3" of lift. 1" extra droop wheel travel when combined with 96504 upper control arms.
- Compression adjuster knobs allow user to fine tune ride for optimum performance.
- All necessary mounting brackets and hardware are included along with detailed instructions.

#### Part # KNG-25001-119A-EXT

#### **EXPEDITION SERIES LOWER CONTROL ARMS - SINGLE SHOCK**



- Newly integrated steering stop tabs retain factory turning angle with no modification necessary to OEM ball joint cradles.
- Pocket added at the coilover shock tabs increases clearance allowing for a wider range of shocks to be used - up to 3.0".
- New billet CNC machined uniball cup provides more turning clearance & increases strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Stock length replacement lower control arm. Part # 86555-E-16-NSS



#### **EXPEDITION SERIES LOWER CONTROL ARMS - DUAL SHOCK**

Part # 86555-E-16

- Newly integrated steering stop tabs retain factory turning angle with no modification necessary to OEM ball joint cradles.
- Pocket added at the coilover shock tabs increases clearance allowing for a wider range of shocks to be used - up to 3.0".
- New billet CNC machined uniball cup provides more turning clearance & increases strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Stock length replacement lower control arms.
- 1.25" wheel spacers required for secondary shock clearance.

#### SPINDLE GUSSET



- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking.
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.

Part # 59698

- LOWER CONTROL ARM CAM TAB GUSSETS Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
  - CNC laser cut 1/8" 4130 chromoly replacement cam plates weld to the frame.
    - 1/4" thick lower cam alignment tabs will not bend like factory tabs.
    - Welding and grinding are required to install.

Part # 59860-10FJ



art # 59698-SB

Part # 86500-16

- Trucks running factory back spacing wheels must run wheel spacers.
  - Welding and grinding are required to install.

#### STOCK LENGTH STANDARD SERIES LOWER CONTROL ARMS Features a two-bolt billet machined uniball adapter. Lower ball joints are upgraded to a 1" stainless steel uniball for maximum wheel travel and added

- component strength. 3/16" main body stock length fully boxed lower control arms are CNC laser cut and include internal gussets.
- Boxed arms feature replaceable urethane pivot bushings. Pivots include zerk fittings to maintain the equipment while bolted on the vehicle.
- 1/4" thick steel skid plate is integrated into the control arm for rock crawling protection.

#### SPINDLE GUSSET W/ SWAY BAR MOUNTS

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking
- Retains the factory sway bar and includes an additional steering arm gusset.
- 1/8" prebent laser cut mild steel brackets.



#### TOYOTA TACOMA STOCK LENGTH ACCESSORIES ACCESSORIES SPECIFIC TO PART #96504

### FRONT



Designed for use with TC stock length Race or Expedition Series lower control arms.

#### **COIL BUCKET TOWER GUSSETS**

- Reduces upper coil bucket flex and double shears factory upper control arm bolt.
- Compatible only with TC UCA's or L/T kits not intended for use with factory control arms.
- Welding and grinding are required to install.



Part # 86612

- Flush mount top plate allows hoop to be used with shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation.
- Reinforces the factory coil bucket and helps reduce flex while lower profile design keeps the hoop from contacting the inner fender well.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.
- 4130 pre-bent chromoly shock hoops are designed to install secondary 2.5" external bypass shocks.
- Lower shock mounting clevis and bump stop relocation brackets are included.
- This kit is designed to be installed with the TC 86500-16 Standard boxed lower control arms.

#### **BODY MOUNT CHOP PLATES**

Part # 59850

- Designed to reinforce factory body mounts after the required trimming to allow the installation of larger tires.
  - 1/8" thick laser cut plates.
  - Welding and cutting required to install.
  - DOES NOT FIT 2021+ Tacomas.

2.5" diameter with remote reservoirs.

(PN: 86610 or 86612 listed above).

Designed for use with TC secondary shock hoops

Requires a lower control arm with dual shock

Externally adjustable compression and rebound



Part # 86610

#### 100% MADE IN THE USA

#### SUPPORT - (951) 737 9682

KING 2.5" EXTERNAL BYPASS SECONDARY SHOCKS

capability.

tubes



### TOYOTA TACOMA STOCK LENGTH ACCESSORIES

ACCESSORIES SPECIFIC TO PART #96504







#### 3-LEAF ADD-A-PACK (PAIR) 1.5" LIFT TACOMA

- Designed to be added to your truck's existing leaf pack.
- Replaces overload leaf giving the ride a more progressive feel.
- Provides 1.5" of lift to the truck.
- Sold as a pair.

Part # DVR-F85

#### KING BUMP STOP 2.0" x 2.0" TRAVEL (FITS PN: 48623K)

- Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.
- Unique mounting boss design with indexing pin securely locates the bump stop without pinching the outside of the tube.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually.

#### REAR BOLT-ON BUMP STOP MOUNTING KIT - KING 2.0" Improves handling and performance on and off road when weight has been added to the bed of the truck. 100% bolt on bump stop bracket mount to the factory bolt holes and replaces the factory bump stop. Utilizes 2" travel KING 2.0" diameter bump stops. Cushions harsh bottom outs. Includes lower strike pads that bolt to the factory U-bolt location. Grade 8 hardware included. Part # 48623K

Sold as a pair (bump stops NOT included).

#### REAR BOLT-ON BUMP STOP MOUNTING KIT - FOX 2.0"

- Improves handling and performance on and off road when weight has been added to the bed of the truck
- 100% bolt on bump stop bracket mount to the factory bolt holes and replaces the factory bump stop
- Utilizes 2.5" travel FOX 2.0" diameter bump stops.
- Cushions harsh bottom outs. Includes lower strike pad that bolts to the factory
- U-bolt location.
- Grade 8 hardware included.
- Sold as a pair (bump stops NOT included).

100% MADE IN THE USA

Part # 48623F

Part # KNG-BS2020



## **TOYOTA TACOMA STOCK LENGTH ACCESSORIES**

ACCESSORIES SPECIFIC TO PART #96504

TACOMA REAR CHANNEL BED STIFFENERS

11111 11

Part # 48676

- Reinforces factory rear bed channels at the tail gate that are known to tear with added camper shell weight, bed racks and off road use. Ideal for any Tacoma that wants to reduce bed flex. Six eyelet tabs are designed to offer additional
  - cargo strapping points to secure your gear during transit along with a flat tab on both sides for CB antenna, buggy whip, cargo light etc. No load ratings are implied.

  - U.S. Patent #D820,180 S.
  - 3/16" mild steel laser cut brackets use existing factory holes, however some drilling is required for installation.
  - Includes all Grade 8 mounting hardware and install instructions.

#### HITCH SKID

Part # 48420

- Protects receiver and chain safety tabs from contact damage on the trail.
- Skid plate is designed to prevent hitch hang-ups while climbing or ascending in rocks and ditches.
- Features a 3/16" steel skid plate.
  - Installs with any hitch pin (not included).
- Powder coated black.





1" STAINLESS STEEL FK UNIBALL AND SNAP RING REPLACEMENT KIT

- 1″ I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity.
- Performance parts will require periodic maintenance based on your driving habits & local
- Uniballs include a military grade PTFE woven fabric liner that helps prevent noise.
- Snap rings included.

#### Part # FK-REP KIT

#### **URETHANE BUSHING KIT: UPPER CONTROL ARMS**

- Complete TC upper control arm urethane replacement bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Inspect bushings and other equipment regularly.
- Contact our facility direct to order these items.

Part # 69000



1" UNIBALL REMOVAL / INSTALL TOOL

press or hammer.

- Complete TC lower control arm replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.

Aids in the removal and reinstallation of a 1" uniball

Designed to be used with any hydraulic press, shop

Prevents damage to new uniball during reassembly.

from any uniball cup during vehicle prep.

- Inspect bushings and other equipment regularly.
  - Contact our facility direct to order these items.



Part # 96006

TC stocks all replacement parts necessary to maintain your performance equipment. Call to order today!






### **2" EXPEDITION SERIES LONG TRAVEL SYSTEM** 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86222T-E-16 [KING/FOX/RADFLO]





#### **Kit Includes**

UPPER A-ARMS W/ BUSHING	S & ZERK FITTINGS
LOWER A-ARMS W/ BUSHING	GS & ZERK FITTINGS
TIE-ROD EXTENSIONS	
PLATED A-ARM END WASHE	RS
D.O.T. BRAIDED BRAKE LINES	;
1" UNIBALLS W/ RETAINING (	CLIPS
LIMIT STRAPS W/ ADJUSTER	5 & MOUNTS
GRADE 8 HARDWARE	
HI-MISALIGNMENT SPACERS	

#### **Features and Benefits**

- The 2" Expedition Series kit features a redesigned lower control arm serving as an evolution of the Race Series LCA's with select features to improve component strength, function and vehicle handling.
- A newly integrated steering stop tab retains the factory turning angle with no modification necessary to the OEM ball joint cradles.
- 2" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 11.5" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.

- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can be custom ordered for this kit (see page 19).
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

#### Recommended Tire & Wheel Combination

wheel Combination			
Tire	Wheel	Backspace	
285/75/R16	16 x 8	4.5″	
285/70/R17	17 x 8.5	4.75″	

#### **Recommended Primary Shock Setup** 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

#### **Recommended Secondary Shock Setup** 2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks TC1119-34		
Note: TC Hoop Part # 86610 is required		

#### **Required Additional Parts** for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS )	86305T

#### **Application Notes**

- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.


#### Fiberglass fenders or extreme fender modifications/cutting required on Tacoma.



### **2" STANDARD SERIES LONG TRAVEL SYSTEM** 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86002T-16 [KING/FOX/RADFLO]





#### **Kit Includes**

UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS		
LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS		
TIE-ROD EXTENSIONS		
PLATED A-ARM END WASHERS		
D.O.T. BRAIDED BRAKE LINES		
1" UNIBALLS W/ RETAINING CLIPS		
LIMIT STRAPS W/ ADJUSTERS & MOUNTS		
GRADE 8 HARDWARE		

HI-MISALIGNMENT SPACERS

#### Features and Benefits

- 2" extended upper and lower control arms bolt to factory mounting locations. 11.5" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can be custom ordered for this kit (see page 20).

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

#### **Recommended Tire &** Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

#### **Recommended Primary Shock Setup** 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

#### Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34
Note: TC Hoop Part # 86610 is required	

#### **Required Additional Parts** for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS )	86305T

#### **Application Notes**

- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.

## **TOYOTA TACOMA ACCESSORIES FOR 2" KITS**

ACCESSORIES SPECIFIC TO PART #86222T-E-16 & 86002T-16



KING LONG TRAVEL COILOVERS W/ ADJUSTERS Long travel specific shocks add 3-4" of lift when paired with a TC long travel kit. 2.5" diameter shocks with remote reservoirs for optimum cooling. Compression adjuster knobs allow user to fine tune ride for optimum performance. Part # KNG-TC 5119-03-A **WELD - ON SPINDLE GUSSETS** run hard in the dirt!

#### KING 2.5 EXTERNAL BYPASS SECONDARY SHOCKS

- Serious levels of performance are achieved when a secondary shock is used with a TC long travel kit.
  - Externally adjustable for both compression and rebound.
- Designed for use with TC secondary shock hoops (PN: 88610).

Part # KNG-TC1119-34

- Must have reinforcement for anyone who wants to
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking.
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.

#### Part # 59698

WELD-ON BODY MOUNT CHOP PLATES

- Designed to reinforce factory body mounts after the required trimming to clearance the installation of larger tires.
- 1/8" thick laser cut plates.
- Welding & cutting required to install.
- DOES NOT FIT 2021+ Tacomas.

#### 59850 Part #

#### SPINDLE GUSSETS WITH SWAY BAR MOUNTS Must have reinforcement for anyone who wants to



Part #

59698-SB

- run hard in the dirt! Strengthens spindle uprights and prevents the
- knuckle from damage during hard impacts under braking. Retains the factory sway bar and includes an
- additional steering arm gusset.
- 1/8" prebent laser cut mild steel brackets.
- Trucks running factory back spacing wheels must run wheel spacers.
- Welding and grinding are required to install.

#### LOWER CONTROL ARM CAM TAB GUSSETS

- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
- CNC laser cut 1/8" 4130 chromoly replacement cam plates weld-to the frame.
- 1/4" thick lower cam alignment tabs will not bend like factory tabs.
  - Welding and grinding are required for installation.

59860-10FJ Part #





### **TOYOTA TACOMA ACCESSORIES FOR 2" KITS** ACCESSORIES SPECIFIC TO PART #86222T-E-16 & 86002T-16

	NTROL ARM SKID PLATES +2"	BOAE SHOCK HOOFS	5 - LONG TRAVEL ARMS
Part # 86007	<ul> <li>Bolt-on aluminum lower skid plates are designed to fit TC 2" long travel system lower control arms.</li> <li>Slide over rocks with an angled approach front lip.</li> <li>Grade 8 mounting hardware is included.</li> <li>Fits Standard Series long travel kits ONLY.</li> </ul>	show elim rear Max inst 413 to ir max 8 Rein flex. Part # 86610 Upp secc 1 Inclu	h mount top plate allows hoop to be used with cks that use bolts or studs on upper mount and inates the need to trim the inner fender well for bolt installation. timize vehicle dampening control when you all a dual 2.5" shock mount system. 0 prebent chromoly shock hoops are designed stall secondary 2.5" bypass shocks for timum IFS dampening control. of orces the factory coil bucket and helps reduced the shock tabs are tacked in place to aid in ondary shock location set up. udes Grade 8 hardware. ding and grinding are required to install.

Does not fit vehicles with KDSS system.





- LT 4WD 4340 AXLES +2" EXTENDED
  - Designed for use with TC +2" Tacoma long travel systems.
  - 4340 heat treated 2" extended axle shafts and clamps are included.
  - Re-uses factory Toyota inner and outer CV joints and boots.
  - Axles are vehicle-specific and are not cross compatible with other Toyota models.

86305T Part #

### **TOYOTA TACOMA ACCESSORIES FOR 2" KITS** ACCESSORIES SPECIFIC TO PART #86222T-E-16 & 86002T-16

REAR

**REAR SHOCK HOOP KIT** 

- Pre-bent bolt on upper shock hoops are designed to install a 10" x 2.5" bypass shock from FOX, KING or RadFlo.
- Built from 1.5" x.120 4130 wall tubing.
- Weld on lower shock mounts are included.
- Designed to work with TC mid travel spring under conversion kits: Part #'s 86450-HD & 86450-LD
- Sand blasted and powder coated semi gloss black.
- All mounting hardware is included.
- Grinding and welding required for installation.

#### 86460 Part #

#### KING BUMP STOP 2.0" x 2.0" TRAVEL (FITS PN: 48623K)

- Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.
- Unique mounting boss design with indexing pin securely locates the bump stop without pinching the outside of the tube.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually for install with PN: 48623K.

#### BOLT ON 2.0" REAR BUMP STOP KIT [FOX]



Part #

Part #

48623F

Part # KNG-BS2020

- Improves handling and performance on and off road when weight has been added to the bed of the truck.
- 100% bolt on bump stop bracket mount to the factory bolt holes and replaces the factory bump stop.
- Utilizes 2.5" travel FOX 2.0" diameter bump stops.
- Includes lower strike pad that bolts to the factory u-bolt location.
- Grade 8 hardware included.
- Sold as a pair (bump stops NOT included).

#### MID TRAVEL REAR - SPRING UNDER CONVERSION KIT W/ SPRINGS



86450-HD

86450-LD

- TOTAL CHAOS designed this kit to offer a light duty (LD) or heavy duty (HD) specific spring pack from Deaver Leaf Spring (springs included).
- Prerunner model Tacomas will require drive line modifications. Adding a slip yoke on the front end is necessary.
- Welding is required for installation.
- Designed to work with factory rubber bump stops or the TOTAL CHAOS 2.0 bump stop system for FOX & KING.
- Wheel spacers must be installed to use stock wheels with the TC air bump or custom rear shock mounts built off the outer frame rail.



#### **KING REAR BYPASS SHOCKS**

- 2.5" shock bodies with piggyback reservoir
- 10" shock stroke.
- Compression and dampening adjustable for maximum performance.
- Requires rear shock hoop (PN: 86460) for install.

#### Part # KNG-PR2510-BP2P

#### BOLT ON 2.0" REAR BUMP STOP KIT [KING]



48623K

Part #

- Improves handling and performance on and off road when weight has been added to the bed of the truck.
- 100% bolt on bump stop bracket mount to the factory bolt holes and replaces the factory bump stop.
- Utilizes 2" travel KING 2.0" diameter bump stops. Cushions harsh bottom outs.
- Includes lower strike pads that bolt to the factory u-bolt location.
- Grade 8 hardware included.
- Sold as a pair (bump stops NOT included).

#### MID TRAVEL REAR - SPRING UNDER CONVERSION MOUNTING KIT



86450

Part #

- TOTAL CHAOS designed this kit to offer a light duty or heavy duty specific spring pack from Deaver Leaf Spring (springs are not included).
- Prerunner model Tacomas will require drive line modifications. Adding a slip yoke on the front end is necessary.
- Welding is required for installation.
- Designed to work with factory rubber bump stops or the TOTAL CHAOS 2.0 bump stop system for FOX & KING.
- Wheel spacers must be installed to use stock wheels with the TC air bump or custom rear shock mounts built off the outer frame rail.

#### TACOMA REAR CHANNEL BED STIFFENERS



Rear sheet metal channels crack over time. Reinforce factory rear bed channels at the tail gate that are known to tear with added camper shell weight, bed racks and off road use.

- Ideal for any Tacoma that wants to prevent bed flex.
- 6 eyelet tabs are designed to offer additional cargo strapping points to secure your gear during transit. An additional flat tab is also supplied to both sides to install a Buggy Whip / CB Antenna / Collision or Cargo Light.
- No load ratings are implied.
- U.S. Patent #D820,180 S.
- 3/16 mild steel laser cut brackets use existing factory holes. Drilling is required for installation.
- Includes all Grade 8 mounting hardware and install instructions.

Cushions harsh bottom outs.



LONG TRAVEL SUSPENSION

SALES GUIDE

### **TOYOTA TACOMA ACCESSORIES FOR 2" KITS** ACCESSORIES SPECIFIC TO PART #86222T-E-16 & 86002T-16



**1" STAINLESS STEEL UNIBALL REPLACEMENT KIT** 

- 1"I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniball's also features a military grade PTFE woven fabric liner that helps prevent noise.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Snap rings included.
- Sold as a pair.

#### Part # FK-REP KIT

#### **URETHANE BUSHING KIT - EXPEDITION & STANDARD SERIES**

- Complete TC long travel suspension system replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Inspect bushings and other equipment regularly.
- Contact our facility direct to order these items.

#### Part # 69700-10FJ

#### **UNIBALL REMOVAL & RE-INSTALLATION TOOL**

- Aids in the removal and reinstallation of a 1" uniball from any uniball cup during vehicle prep.
- Designed to be used with any hydraulic press, shop press or a hammer.
- Prevents damage to new uniball during reassembly.

#### Part # 96006

#### ADDITIONAL REPLACEMENT PARTS


- TC stocks all replacement parts necessary to maintain your performance equipment.
- **Tie-Rod Extensions**
- Plated A-Arm End Washers
- D.O.T. Braided Brake Lines
- Limit Straps w/ Adjusters & Mounts
- Grade 8 Hardware
- Hi-Misalignment Spacers
- Customers must contact our facility directly to order these items.



### **3.5" RACE SERIES LONG TRAVEL SYSTEM** 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86000-R-16 [KING/FOX/RADFLO]





#### LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS TIE-ROD EXTENSIONS

**Kit Includes** 

PLATED A-ARM END WASHERS

D.O.T. BRAIDED BRAKE LINES

1" UNIBALLS W/ RETAINING CLIPS

UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS

LIMIT STRAPS W/ ADJUSTERS & MOUNTS

GRADE 8 HARDWARE

HI-MISALIGNMENT SPACERS

#### **Features and Benefits**

- 100% chromoly constructed race system offers maximum ground clearance and weighs 10 pounds less than the standard TC +3.5" LT kit.
- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can

be custom ordered for this kit (see page 21).

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

## Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

#### Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Part #
880-06-953
KNG-TC 5119-03-A

#### Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34
Note: TC Hoop Part # 86610 is re	equired

Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS )	86301

#### Application Notes


- Suspension travel varies on every vehicle.
   Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.



### **3.5" STANDARD SERIES LONG TRAVEL SYSTEM** 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86000-16 [king/fox/radflo]





#### **Kit Includes**

UPPER A-ARMS W/ BUSHINGS & ZERK FITTINGS
LOWER A-ARMS W/ BUSHINGS & ZERK FITTINGS
TIE-ROD EXTENSIONS
PLATED A-ARM END WASHERS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

#### **Features and Benefits**

- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- Urethane bushings reduce bushing deflection compared to stock rubber bushings.
- Heim pivot upper control arms can be custom ordered for this kit (see page 22).

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

#### Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

#### Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Part #
880-06-953
KNG-TC 5119-03-A

### Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks	TC1119-34	
Nata TC Haan Dart # 86610 is required		

Note: TC Hoop Part # 86610 is required

### Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS )	86301

#### **Application Notes**

- Suspension travel varies on every vehicle.
   Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.

### Fiberglass fenders are required to run this kit.

KING LONG TRAVEL COILOVERS W/ ADJUSTERS

optimum cooling.

### HAND MADE IN THE USA

## **TOYOTA TACOMA ACCESSORIES FOR 3.5" KITS**

ACCESSORIES SPECIFIC TO PART #86000-R-16 & 86000-16

paired with a TC long travel kit.

ride for optimum performance.

### FRONT

Long travel specific shocks add 3-4" of lift when 2.5" diameter shocks with remote reservoirs for rebound. Compression adjuster knobs allow user to fine tune

- KING 2.5 EXTERNAL BYPASS SECONDARY SHOCKS
  - Serious levels of performance are achieved when a secondary shock is used with a TC long travel kit. Externally adjustable for both compression and

  - Designed for use with TC secondary shock hoops (PN: 88610).

KNG-TC1119-34 Part #

KNG-TC 5119-03-A

#### WELD - ON SPINDLE GUSSETS

- Must have reinforcement for anyone who wants to run hard in the dirt!
- Strengthens spindle uprights and prevents the knuckle from damage during hard impacts under braking.
- 1/8" prebent laser cut mild steel brackets.
- Eliminates the factory sway bar.
- Welding and grinding are required to install.

#### Part # 59698

Part #

#### WELD-ON BODY MOUNT CHOP PLATES

- Designed to reinforce factory body mounts after the required trimming to clearance the installation of larger tires.
- 1/8" thick laser cut plates.
- Instructions included.
- Welding & cutting required to install.
- DOES NOT FIT 2021+ Tacomas.

#### Part # 59850

#### LT LOWER CONTROL ARM SKID PLATES +3.5"

- Bolt-on aluminum lower skid plates are designed to fit TC 3.5" long travel system lower control arms.
- Slide over rocks with an angled approach front lip.
- Grade 8 mounting hardware is included.
- Fits Standard Series long travel kits ONLY.

#### Part # 86005

#### SPINDLE GUSSETS WITH SWAY BAR MOUNTS

- Must have reinforcement for anyone who wants to run hard in the dirt! Strengthens spindle uprights and prevents the
- knuckle from damage during hard impacts under braking.
- Retains the factory sway bar and includes an additional steering arm gusset.
- 1/8" prebent laser cut mild steel brackets.
- Trucks running factory back spacing wheels must run wheel spacers.
- Welding and grinding are required to install.

#### LOWER CONTROL ARM CAM TAB GUSSETS

- Reinforces weak factory cam alignment tab plates that bend during bottom outs or hard front impacts.
- CNC laser cut 1/8" 4130 chromoly replacement cam plates weld-to the frame.
- 1/4" thick lower cam alignment tabs will not bend like factory tabs.
- Welding and grinding are required for installation.

#### 59860-10FJ Part #

Part # 59698-SB

#### **DUAL SHOCK HOOPS - LONG TRAVEL ARMS**



Part # 86610

- Flush mount top plate allows hoop to be used with shocks that use bolts or studs on upper mount and eliminates the need to trim the inner fender well for rear bolt installation.
- Maximize vehicle dampening control when you install a dual 2.5" shock mount system.
- 4130 prebent chromoly shock hoops are designed to install secondary 2.5" bypass shocks for maximum IFS dampening control.
- Reinforces the factory coil bucket and helps reduce flex
- Upper shock tabs are tacked in place to aid in secondary shock location set up.
- Includes Grade 8 hardware.
- Welding and grinding are required to install.





LONG TRAVEL SUSPENSION

SALES GUIDE

### **TOYOTA TACOMA ACCESSORIES FOR 3.5" KITS**

ACCESSORIES SPECIFIC TO PART # 86000-R-16 & 86000-16

### FRONT



4WD

#### LT 4WD 4340 AXLES +2" EXTENDED

- Designed for use with TC +2" Tacoma long travel systems.
- 4340 heat treated 2" extended axle shafts and clamps are included.
- Re-uses factory Toyota inner and outer CV joints and boots.
- Axles are vehicle-specific and are not cross compatible with other Toyota models.





### **TOYOTA TACOMA ACCESSORIES FOR 3.5" KITS** ACCESSORIES SPECIFIC TO PART # 86000-R-16 & 86000-16

REAR

**REAR SHOCK HOOP KIT** 



- to install a 10" x 2.5" bypass shock from FOX, KING or RadFlo. Built from 1.5" x.120 4130 wall tubing.
- Weld on lower shock mounts are included.
- Designed to work with TC mid travel spring under conversion kits: Part #'s 86450-HD & 86450-LD

Pre-bent bolt on upper shock hoops are designed

- Sand blasted and powder coated semi gloss black.
- All mounting hardware is included.
- Grinding and welding required for installation.

86460 Part #

#### KING BUMP STOP 2.0" x 2.0" TRAVEL (FITS PN: 48623K)

Double sealed Schrader cover that mounts to the body, not the valve itself creates a positive seal and keeps dirt and moisture out.

- Unique mounting boss design with indexing pin securely locates the bump stop without pinching the outside of the tube.
- Aluminum components are machined from aircraft quality billet.
- Large diameter shafts have a minimum tensile strength of 75,000 PSI.
- Long wearing nylon contact pad ensures quiet operation and mounts with a simple yet effective single bolt design.
- Sold individually for install with PN: 48623K.

#### BOLT ON 2.0" REAR BUMP STOP KIT [FOX]



Part #

Part #

48623F

Part # KNG-BS2020

- Improves handling and performance on and off road when weight has been added to the bed of the truck.
- 100% bolt on bump stop bracket mount to the factory bolt holes and replaces the factory bump stop.
- Utilizes 2.5" travel FOX 2.0" diameter bump stops.
- Cushions harsh bottom outs.
- Includes lower strike pad that bolts to the factory u-bolt location.
- Grade 8 hardware included.
- Sold as a pair (bump stops NOT included).

#### MID TRAVEL REAR - SPRING UNDER CONVERSION KIT W/ SPRINGS



86450-HD

86450-LD

- TOTAL CHAOS designed this kit to offer a light duty (LD) or heavy duty (HD) specific spring pack from Deaver Leaf Spring (springs included).
- Prerunner model Tacomas will require drive line modifications. Adding a slip yoke on the front end is necessary.
- Welding is required for installation.
- Designed to work with factory rubber bump stops or the TOTAL CHAOS 2.0 bump stop system for FOX & KING.
- Wheel spacers must be installed to use stock wheels with the TC air bump or custom rear shock mounts built off the outer frame rail.



#### **KING REAR BYPASS SHOCKS**

- 2.5" shock bodies with piggyback reservoir
- 10" shock stroke.
- Compression and dampening adjustable for maximum performance.
- Requires rear shock hoop (PN: 86460) for install.

KNG-PR2510-BP2P Part #

#### BOLT ON 2.0" REAR BUMP STOP KIT [KING]



48623K

- Improves handling and performance on and off road when weight has been added to the bed of the truck.
- 100% bolt on bump stop bracket mount to the factory bolt holes and replaces the factory bump stop.
- Utilizes 2" travel KING 2.0" diameter bump stops. Cushions harsh bottom outs.
- Includes lower strike pads that bolt to the factory u-bolt location.
- Grade 8 hardware included.
- Sold as a pair (bump stops NOT included).

#### MID TRAVEL REAR - SPRING UNDER CONVERSION MOUNTING KIT



- TOTAL CHAOS designed this kit to offer a light duty or heavy duty specific spring pack from Deaver Leaf Spring (springs are not included).
- Prerunner model Tacomas will require drive line modifications. Adding a slip yoke on the front end is necessary.
- Welding is required for installation.
- Designed to work with factory rubber bump stops or the TOTAL CHAOS 2.0 bump stop system for FOX & KING.
- Wheel spacers must be installed to use stock wheels with the TC air bump or custom rear shock mounts built off the outer frame rail.

#### TACOMA REAR CHANNEL BED STIFFENERS



48676 Part #

- Rear sheet metal channels crack over time. Reinforce factory rear bed channels at the tail gate that are known to tear with added camper shell weight, bed racks and off road use.
- Ideal for any Tacoma that wants to prevent bed flex.
- 6 eyelet tabs are designed to offer additional cargo strapping points to secure your gear during transit. An additional flat tab is also supplied to both sides to install a Buggy Whip / CB Antenna / Collision or Cargo Light.
- No load ratings are implied.
- U.S. Patent #D820.180 S.
  - 3/16 mild steel laser cut brackets use existing factory holes. Drilling is required for installation.
- Includes all Grade 8 mounting hardware and install instructions.

86450

Part #

Part #





LONG TRAVEL SUSPENSION

SALES GUIDE

### **TOYOTA TACOMA ACCESSORIES FOR 3.5" KITS** ACCESSORIES SPECIFIC TO PART #86000-R-16 & 86000-16

PREP



#### 1" STAINLESS STEEL UNIBALL REPLACEMENT KIT

- 1"I.D. uniballs feature a heat treated stainless steel ball & heat treated stainless steel race for maximum corrosion resistance and component longevity. These uniball's also features a military grade PTFE woven fabric liner that helps prevent noise.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Snap rings included.
- Sold as a pair.

#### Part # FK-REP KIT



#### UNIBALL REMOVAL & RE-INSTALLATION TOOL

- Aids in the removal and reinstallation of a 1" uniball from any uniball cup during vehicle prep.
- Designed to be used with any hydraulic press, shop press or a hammer.
- Prevents damage to new uniball during reassembly.



#### LONG TRAVEL URETHANE BUSHING KIT

- Complete TC long travel suspension system replacement urethane bushing kit.
- Performance parts will require periodic maintenance based on your driving habits & local conditions.
- Inspect bushings and other equipment regularly.
- Contact our facility direct to order these items.

#### ADDITIONAL REPLACEMENT PARTS

- TC stocks all replacement parts necessary to maintain your performance equipment.
- Tie-Rod Extensions
- Plated A-Arm End Washers
- D.O.T. Braided Brake Lines
- Limit Straps w/ Adjusters & Mounts
- Grade 8 Hardware
- Hi-Misalignment Spacers
- Please have your customers contact TC directly for any individual replacement parts.






### **2" EXPEDITION SERIES LONG TRAVEL SYSTEM W/ HEIMS** 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86222T-E-H-16 [king/fox/radflo]





Kit Includes
UPPER A-ARMS W/ HEIMS
LOWER A-ARMS W/ BUSHINGS
TIE-ROD EXTENSIONS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

#### Features and Benefits

- The 2" Expedition Series kit features a redesigned lower control arm serving as an evolution of the Race Series LCA's with select features to improve component strength, function and vehicle handling.
- A newly integrated steering stop tab retains the factory turning angle with no modification necessary to the OEM ball joint cradles.
- 2" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 11.5" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.

- Heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- Maximize tunability, overall articulation & performance.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

### Recommended Tire &

Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

### Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

### Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #		
Fox Shocks	982-02-954		
King Shocks TC1119-34			
Note: TC Hoop Part # 86610 is required			

### Required Additional Parts for Installation

	Part	Part #
ľ	Coilover Shocks	See chart above
	TC Extended Axles (4WD MODELS )	86305T

#### Application Notes

- Suspension travel varies on every vehicle. Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders or extreme fender modifications/cutting required on Tacoma.



### 2" STANDARD LONG TRAVEL SYSTEM W/ HEIMS 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86002T-H-16 [king/fox/radflo]



Kit Includes
UPPER A-ARMS W/ HEIMS
LOWER A-ARMS W/ BUSHINGS
TIE-ROD EXTENSIONS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

#### **Features and Benefits**

- 2" extended upper and lower control arms bolt to factory mounting locations. 11.5" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.
- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

### Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

#### Recommended Primary Shock Setup

2.5" Diameter Long Travel Coilover Shocks		
Shock Manufacturer	Part #	
Fox Shocks	880-06-953	
King Shocks	KNG-TC 5119-03-A	

### Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #		
Fox Shocks	982-02-954		
King Shocks TC1119-34			
Note: TC Hoop Part # 86610 is required			

### Required Additional Parts for Installation


# Part Part # Coilover Shocks See chart above TC Extended Axles (4WD MODELS ) 86305T

#### **Application Notes**

- Suspension travel varies on every vehicle.
   Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.

### **3.5" RACE SERIES LONG TRAVEL SYSTEM W/ HEIMS** 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86000-R-H-16 [king/fox/radflo]

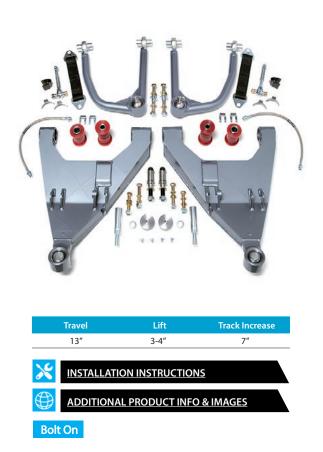

Kit Includes
UPPER A-ARMS W/ HEIMS
LOWER A-ARMS W/ BUSHINGS
TIE-ROD EXTENSIONS
D.O.T. BRAIDED BRAKE LINES
1" UNIBALLS W/ RETAINING CLIPS
LIMIT STRAPS W/ ADJUSTERS & MOUNTS
GRADE 8 HARDWARE
HI-MISALIGNMENT SPACERS

#### **Features and Benefits**

- 100% chromoly constructed race system offers maximum ground clearance and weighs 10 pounds less than the standard TC +3.5" LT kit.
- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

### Recommended Tire & Wheel Combination

Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

## Recommended Primary Shock Setup 2.5" Diameter Long Travel Coilover Shocks

Shock Manufacturer	Part #
Fox Shocks	880-06-953
King Shocks	KNG-TC 5119-03-A

## Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #	
Fox Shocks	982-02-954	
King Shocks	TC1119-34	
Note: TC Hoop Part # 86610 is required		

### Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS )	86301


#### **Application Notes**

- Suspension travel varies on every vehicle.
   Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.



### **3.5" STANDARD LONG TRAVEL SYSTEM W/ HEIMS** 2016+ TOYOTA TACOMA 4WD / PRERUNNER - 6 LUG

#### PART # 86000-H-16 [king/fox/radflo]



# 13" 3-4" 7" INSTALLATION INSTRUCTIONS ADDITIONAL PRODUCT INFO & IMAGES

#### Bolt On

#### Recommended Tire & Wheel Combination

Wheel combination		
Tire	Wheel	Backspace
285/75/R16	16 x 8	4.5″
285/70/R17	17 x 8.5	4.75″

#### Kit Includes UPPER A-ARMS W/ HEIMS LOWER A-ARMS W/ BUSHINGS TIE-ROD EXTENSIONS D.O.T. BRAIDED BRAKE LINES 1" UNIBALLS W/ RETAINING CLIPS LIMIT STRAPS W/ ADJUSTERS & MOUNTS

### GRADE 8 HARDWARE

#### Features and Benefits

- 3.5" extended upper and lower control arms bolt to factory mounting locations. Fiberglass fenders are required. 13" of travel.
- Two-bolt adapters convert lower ball joint to a 1" uniball.
- Upper and lower ball joints are upgraded to 1" stainless steel uniballs for max travel and component strength.
- 4130 chromoly tubing heim upper control arms are fully adjustable to allow maximum tuning of caster and camber.

- Boxed lower control arms include dual 2.5" shock tabs. Primary coilover shocks bolt into the factory coil bucket location.
- Several spring rate options allow the ability to customize your ride for your specific application.
- TC includes 3/4" chromoly lined heim joints for the pivots.
- TC custom extended 4340 axles insert into the factory inner and outer CV's to retain 4wd (not included).

### Recommended Primary Shock Setup

2.5 Diameter Long Traver Collover Shocks		
Shock Manufacturer	Part #	
Fox Shocks	880-06-953	
King Shocks	KNG-TC 5119-03-A	

### Recommended Secondary Shock Setup 2.5" External Bypass Shocks

Shock Manufacturer	Part #
Fox Shocks	982-02-954
King Shocks	TC1119-34

Note: TC Hoop Part # 86610 is required

### Required Additional Parts for Installation

Part	Part #
Coilover Shocks	See chart above
TC Extended Axles (4WD MODELS )	86301

#### **Application Notes**

- Suspension travel varies on every vehicle.
   Welding is required to mount the limit strap mounts and bump stop spacer.
- This kit was not intended to use air bumps.
- Fiberglass fenders are required to run this kit.